

**(12) PATENT APPLICATION**  
**(19) AUSTRALIAN PATENT OFFICE**

**(11) Application No. AU 200020703 A1**

(54) Title  
Floor covering, consisting of hard floor panels and method for manufacturing such floor panels

(51)<sup>7</sup> International Patent Classification(s)  
E04F 015/04 F16B 005/00

(21) Application No: 200020703 (22) Application Date: 2000.03.07

(43) Publication Date : 2000.06.01  
(43) Publication Journal Date : 2000.06.01

(62) Divisional of:  
199732569

(71) Applicant(s)  
Unilin Beheer B.V.

(72) Inventor(s)  
Name Not Given

(74) Agent/Attorney  
DAVIES COLLISON CAVE,GPO Box 3876,SYDNEY NSW 2001



**BEST AVAILABLE COPY**

## ABSTRACT

- 5 Floor covering, consisting of hard floor panels which, at least at the edges of two opposite sides, are provided with coupling parts, cooperating with each other, substantially in the form of a tongue and a groove, characterised in that the coupling parts are provided with integrated mechanical locking means which prevent the drifting apart of two coupled floor panels into a direction (R) perpendicular to the related edges and parallel to the
- 10 underside of the coupled floor panels.

2  
3  
4  
5  
6  
7  
8  
9  
10  
11  
12  
13  
14  
15  
16  
17  
18  
19  
20  
21  
22  
23  
24  
25  
26  
27  
28  
29  
30  
31  
32  
33  
34  
35  
36  
37  
38  
39  
40  
41  
42  
43  
44  
45  
46  
47  
48  
49  
50  
51  
52  
53  
54  
55  
56  
57  
58  
59  
60  
61  
62  
63  
64  
65  
66  
67  
68  
69  
70  
71  
72  
73  
74  
75  
76  
77  
78  
79  
80  
81  
82  
83  
84  
85  
86  
87  
88  
89  
90  
91  
92  
93  
94  
95  
96  
97  
98  
99  
100  
101  
102  
103  
104  
105  
106  
107  
108  
109  
110  
111  
112  
113  
114  
115  
116  
117  
118  
119  
120  
121  
122  
123  
124  
125  
126  
127  
128  
129  
130  
131  
132  
133  
134  
135  
136  
137  
138  
139  
140  
141  
142  
143  
144  
145  
146  
147  
148  
149  
150  
151  
152  
153  
154  
155  
156  
157  
158  
159  
160  
161  
162  
163  
164  
165  
166  
167  
168  
169  
170  
171  
172  
173  
174  
175  
176  
177  
178  
179  
180  
181  
182  
183  
184  
185  
186  
187  
188  
189  
190  
191  
192  
193  
194  
195  
196  
197  
198  
199  
200  
201  
202  
203  
204  
205  
206  
207  
208  
209  
210  
211  
212  
213  
214  
215  
216  
217  
218  
219  
220  
221  
222  
223  
224  
225  
226  
227  
228  
229  
230  
231  
232  
233  
234  
235  
236  
237  
238  
239  
240  
241  
242  
243  
244  
245  
246  
247  
248  
249  
250  
251  
252  
253  
254  
255  
256  
257  
258  
259  
260  
261  
262  
263  
264  
265  
266  
267  
268  
269  
270  
271  
272  
273  
274  
275  
276  
277  
278  
279  
280  
281  
282  
283  
284  
285  
286  
287  
288  
289  
290  
291  
292  
293  
294  
295  
296  
297  
298  
299  
300  
301  
302  
303  
304  
305  
306  
307  
308  
309  
310  
311  
312  
313  
314  
315  
316  
317  
318  
319  
320  
321  
322  
323  
324  
325  
326  
327  
328  
329  
330  
331  
332  
333  
334  
335  
336  
337  
338  
339  
340  
341  
342  
343  
344  
345  
346  
347  
348  
349  
350  
351  
352  
353  
354  
355  
356  
357  
358  
359  
360  
361  
362  
363  
364  
365  
366  
367  
368  
369  
370  
371  
372  
373  
374  
375  
376  
377  
378  
379  
380  
381  
382  
383  
384  
385  
386  
387  
388  
389  
390  
391  
392  
393  
394  
395  
396  
397  
398  
399  
400  
401  
402  
403  
404  
405  
406  
407  
408  
409  
410  
411  
412  
413  
414  
415  
416  
417  
418  
419  
420  
421  
422  
423  
424  
425  
426  
427  
428  
429  
430  
431  
432  
433  
434  
435  
436  
437  
438  
439  
440  
441  
442  
443  
444  
445  
446  
447  
448  
449  
450  
451  
452  
453  
454  
455  
456  
457  
458  
459  
460  
461  
462  
463  
464  
465  
466  
467  
468  
469  
470  
471  
472  
473  
474  
475  
476  
477  
478  
479  
480  
481  
482  
483  
484  
485  
486  
487  
488  
489  
490  
491  
492  
493  
494  
495  
496  
497  
498  
499  
500  
501  
502  
503  
504  
505  
506  
507  
508  
509  
510  
511  
512  
513  
514  
515  
516  
517  
518  
519  
520  
521  
522  
523  
524  
525  
526  
527  
528  
529  
530  
531  
532  
533  
534  
535  
536  
537  
538  
539  
540  
541  
542  
543  
544  
545  
546  
547  
548  
549  
550  
551  
552  
553  
554  
555  
556  
557  
558  
559  
560  
561  
562  
563  
564  
565  
566  
567  
568  
569  
570  
571  
572  
573  
574  
575  
576  
577  
578  
579  
580  
581  
582  
583  
584  
585  
586  
587  
588  
589  
590  
591  
592  
593  
594  
595  
596  
597  
598  
599  
600  
601  
602  
603  
604  
605  
606  
607  
608  
609  
610  
611  
612  
613  
614  
615  
616  
617  
618  
619  
620  
621  
622  
623  
624  
625  
626  
627  
628  
629  
630  
631  
632  
633  
634  
635  
636  
637  
638  
639  
640  
641  
642  
643  
644  
645  
646  
647  
648  
649  
650  
651  
652  
653  
654  
655  
656  
657  
658  
659  
660  
661  
662  
663  
664  
665  
666  
667  
668  
669  
670  
671  
672  
673  
674  
675  
676  
677  
678  
679  
680  
681  
682  
683  
684  
685  
686  
687  
688  
689  
690  
691  
692  
693  
694  
695  
696  
697  
698  
699  
700  
701  
702  
703  
704  
705  
706  
707  
708  
709  
710  
711  
712  
713  
714  
715  
716  
717  
718  
719  
720  
721  
722  
723  
724  
725  
726  
727  
728  
729  
730  
731  
732  
733  
734  
735  
736  
737  
738  
739  
740  
741  
742  
743  
744  
745  
746  
747  
748  
749  
750  
751  
752  
753  
754  
755  
756  
757  
758  
759  
760  
761  
762  
763  
764  
765  
766  
767  
768  
769  
770  
771  
772  
773  
774  
775  
776  
777  
778  
779  
780  
781  
782  
783  
784  
785  
786  
787  
788  
789  
790  
791  
792  
793  
794  
795  
796  
797  
798  
799  
800  
801  
802  
803  
804  
805  
806  
807  
808  
809  
810  
811  
812  
813  
814  
815  
816  
817  
818  
819  
820  
821  
822  
823  
824  
825  
826  
827  
828  
829  
830  
831  
832  
833  
834  
835  
836  
837  
838  
839  
840  
841  
842  
843  
844  
845  
846  
847  
848  
849  
850  
851  
852  
853  
854  
855  
856  
857  
858  
859  
860  
861  
862  
863  
864  
865  
866  
867  
868  
869  
870  
871  
872  
873  
874  
875  
876  
877  
878  
879  
880  
881  
882  
883  
884  
885  
886  
887  
888  
889  
890  
891  
892  
893  
894  
895  
896  
897  
898  
899  
900  
901  
902  
903  
904  
905  
906  
907  
908  
909  
910  
911  
912  
913  
914  
915  
916  
917  
918  
919  
920  
921  
922  
923  
924  
925  
926  
927  
928  
929  
930  
931  
932  
933  
934  
935  
936  
937  
938  
939  
940  
941  
942  
943  
944  
945  
946  
947  
948  
949  
950  
951  
952  
953  
954  
955  
956  
957  
958  
959  
960  
961  
962  
963  
964  
965  
966  
967  
968  
969  
970  
971  
972  
973  
974  
975  
976  
977  
978  
979  
980  
981  
982  
983  
984  
985  
986  
987  
988  
989  
990  
991  
992  
993  
994  
995  
996  
997  
998  
999  
1000  
1001  
1002  
1003  
1004  
1005  
1006  
1007  
1008  
1009  
1010  
1011  
1012  
1013  
1014  
1015  
1016  
1017  
1018  
1019  
1020  
1021  
1022  
1023  
1024  
1025  
1026  
1027  
1028  
1029  
1030  
1031  
1032  
1033  
1034  
1035  
1036  
1037  
1038  
1039  
1040  
1041  
1042  
1043  
1044  
1045  
1046  
1047  
1048  
1049  
1050  
1051  
1052  
1053  
1054  
1055  
1056  
1057  
1058  
1059  
1060  
1061  
1062  
1063  
1064  
1065  
1066  
1067  
1068  
1069  
1070  
1071  
1072  
1073  
1074  
1075  
1076  
1077  
1078  
1079  
1080  
1081  
1082  
1083  
1084  
1085  
1086  
1087  
1088  
1089  
1090  
1091  
1092  
1093  
1094  
1095  
1096  
1097  
1098  
1099  
1100  
1101  
1102  
1103  
1104  
1105  
1106  
1107  
1108  
1109  
1110  
1111  
1112  
1113  
1114  
1115  
1116  
1117  
1118  
1119  
1120  
1121  
1122  
1123  
1124  
1125  
1126  
1127  
1128  
1129  
1130  
1131  
1132  
1133  
1134  
1135  
1136  
1137  
1138  
1139  
1140  
1141  
1142  
1143  
1144  
1145  
1146  
1147  
1148  
1149  
1150  
1151  
1152  
1153  
1154  
1155  
1156  
1157  
1158  
1159  
1160  
1161  
1162  
1163  
1164  
1165  
1166  
1167  
1168  
1169  
1170  
1171  
1172  
1173  
1174  
1175  
1176  
1177  
1178  
1179  
1180  
1181  
1182  
1183  
1184  
1185  
1186  
1187  
1188  
1189  
1190  
1191  
1192  
1193  
1194  
1195  
1196  
1197  
1198  
1199  
1200  
1201  
1202  
1203  
1204  
1205  
1206  
1207  
1208  
1209  
1210  
1211  
1212  
1213  
1214  
1215  
1216  
1217  
1218  
1219  
1220  
1221  
1222  
1223  
1224  
1225  
1226  
1227  
1228  
1229  
1230  
1231  
1232  
1233  
1234  
1235  
1236  
1237  
1238  
1239  
1240  
1241  
1242  
1243  
1244  
1245  
1246  
1247  
1248  
1249  
1250  
1251  
1252  
1253  
1254  
1255  
1256  
1257  
1258  
1259  
1260  
1261  
1262  
1263  
1264  
1265  
1266  
1267  
1268  
1269  
1270  
1271  
1272  
1273  
1274  
1275  
1276  
1277  
1278  
1279  
1280  
1281  
1282  
1283  
1284  
1285  
1286  
1287  
1288  
1289  
1290  
1291  
1292  
1293  
1294  
1295  
1296  
1297  
1298  
1299  
1300  
1301  
1302  
1303  
1304  
1305  
1306  
1307  
1308  
1309  
1310  
1311  
1312  
1313  
1314  
1315  
1316  
1317  
1318  
1319  
1320  
1321  
1322  
1323  
1324  
1325  
1326  
1327  
1328  
1329  
1330  
1331  
1332  
1333  
1334  
1335  
1336  
1337  
1338  
1339  
1340  
1341  
1342  
1343  
1344  
1345  
1346  
1347  
1348  
1349  
1350  
1351  
1352  
1353  
1354  
1355  
1356  
1357  
1358  
1359  
1360  
1361  
1362  
1363  
1364  
1365  
1366  
1367  
1368  
1369  
1370  
1371  
1372  
1373  
1374  
1375  
1376  
1377  
1378  
1379  
1380  
1381  
1382  
1383  
1384  
1385  
1386  
1387  
1388  
1389  
1390  
1391  
1392  
1393  
1394  
1395  
1396  
1397  
1398  
1399  
1400  
1401  
1402  
1403  
1404  
1405  
1406  
1407  
1408  
1409  
1410  
1411  
1412  
1413  
1414  
1415  
1416  
1417  
1418  
1419  
1420  
1421  
1422  
1423  
1424  
1425  
1426  
1427  
1428  
1429  
1430  
1431  
1432  
1433  
1434  
1435  
1436  
1437  
1438  
1439  
1440  
1441  
1442  
1443  
1444  
1445  
1446  
1447  
1448  
1449  
1450  
1451  
1452  
1453  
1454  
1455  
1456  
1457  
1458  
1459  
1460  
1461  
1462  
1463  
1464  
1465  
1466  
1467  
1468  
1469  
1470  
1471  
1472  
1473  
1474  
1475  
1476  
1477  
1478  
1479  
1480  
1481  
1482  
1483  
1484  
1485  
1486  
1487  
1488  
1489  
1490  
1491  
1492  
1493  
1494  
1495  
1496  
1497  
1498  
1499  
1500  
1501  
1502  
1503  
1504  
1505  
1506  
1507  
1508  
1509  
1510  
1511  
1512  
1513  
1514  
1515  
1516  
1517  
1518  
1519  
1520  
1521  
1522  
1523  
1524  
1525  
1526  
1527  
1528  
1529  
1530  
1531  
1532  
1533  
1534  
1535  
1536  
1537  
1538  
1539  
1540  
1541  
1542  
1543  
1544  
1545  
1546  
1547  
1548  
1549  
1550  
1551  
1552  
1553  
1554  
1555  
1556  
1557  
1558  
1559  
1560  
1561  
1562  
1563  
1564  
1565  
1566  
1567  
1568  
1569  
1570  
1571  
1572  
1573  
1574  
1575  
1576  
1577  
1578  
1579  
1580  
1581  
1582  
1583  
1584  
1585  
1586  
1587  
1588  
1589  
1590  
1591  
1592  
1593  
1594  
1595  
1596  
1597  
1598  
1599  
1600  
1601  
1602  
1603  
1604  
1605  
1606  
1607  
1608  
1609  
1610  
1611  
1612  
1613  
1614  
1615  
1616  
1617  
1618  
1619  
1620  
1621  
1622  
1623  
1624  
1625  
1626  
1627  
1628  
1629  
1630  
1631  
1632  
1633  
1634  
1635  
1636  
1637  
1638  
1639  
1640  
1641  
1642  
1643  
1644  
1645  
1646  
1647  
1648  
1649  
1650  
1651  
1652  
1653  
1654  
1655  
1656  
1657  
1658  
1659  
1660  
1661  
1662  
1663  
1664  
1665  
1666  
1667  
1668  
1669  
1670  
1671  
1672  
1673  
1674  
1675  
1676  
1677  
1678  
1679  
1680  
1681  
1682  
1683  
1684  
1685  
1686  
1687  
1688  
1689  
1690  
1691  
1692  
1693  
1694  
1695  
1696  
1697  
1698  
1699  
1700  
1701  
1702  
1703  
1704  
1705  
1706  
1707  
1708  
1709  
1710  
1711  
1712  
1713  
1714  
1715  
1716  
1717  
1718  
1719  
1720  
1721  
1722  
1723  
1724  
1725  
1726  
1727  
1728  
1729  
1730  
1731  
1732  
1733  
1734  
1735  
1736  
1737  
1738  
1739  
1740  
1741  
1742  
1743  
1744  
1745  
1746  
1747  
1748  
1749  
1750  
1751  
1752  
1753  
1754  
1755  
1756  
1757  
1758  
1759  
1760  
1761  
1762  
1763  
1764  
1765  
1766  
1767  
1768  
1769  
1770  
1771  
1772  
1773  
1774  
1775  
1776  
1777  
1778  
1779  
1780  
1781  
1782  
1783  
1784  
1785  
1786  
1787  
1788  
1789  
1790  
1791  
1792  
1793  
1794  
1795  
1796  
1797  
1798  
1799  
1800  
1801  
1802  
1803  
1804  
1805  
1806  
1807  
1808  
1809  
1810  
1811  
1812  
1813  
1814  
1815  
1816  
1817  
1818  
1819  
1820  
1821  
1822  
1823  
1824  
1825  
1826  
1827  
1828  
1829  
1830  
1831  
1832  
1833  
1834  
1835  
1836  
1837  
1838  
1839  
1840  
1841  
1842  
1843  
1844  
1845  
1846  
1847  
1848  
1849  
1850  
1851  
1852  
1853  
1854  
1855  
1856  
1857  
1858  
1859  
1860  
1861  
1862  
1863  
1864  
1865  
1866  
1867  
1868  
1869  
1870  
1871  
1872  
1873  
1874  
1875  
1876  
1877  
1878  
1879  
1880  
1881  
1882  
1883  
1884  
1885  
1886  
1887  
1888  
1889  
1890  
1891  
1892  
1893  
1894  
1895  
1896  
1897  
1898  
1899  
1900  
1901  
1902  
1903  
1904  
1905  
1906  
1907  
1908  
1909  
1910  
1911  
1912  
1913  
1914  
1915  
1916  
1917  
1918  
1919  
1920  
1921  
1922  
1923  
1924  
1925  
1926  
1927  
1928  
1929  
1930  
1931  
1932  
1933  
1934  
1935  
1936  
1937  
1938  
1939  
1940  
1941  
1942  
1943  
1944  
1945  
1946  
1947  
1948  
1949  
1950  
1951  
1952  
1953  
1954  
1955  
1956  
1957  
1958  
1959  
1960  
1961  
1962  
1963  
1964  
1965  
1966  
1967  
1968  
1969  
1970  
1971  
1972  
1973  
1974  
1975  
1976  
1977  
1978  
1979  
1980  
1981  
1982  
1983  
1984  
1985  
1986  
1987  
1988  
1989  
1990  
1991  
1992  
1993  
1994  
1995  
1996  
1997  
1998  
1999  
2000  
2001  
2002  
2003  
2004  
2005  
2006  
2007  
2008  
2009  
2010  
2011  
2012  
2013  
2014  
2015  
2016  
2017  
2018  
2019  
2020  
2021  
2022  
2023  
2024  
2025  
2026  
2027  
2028  
2029  
2030  
2031  
2032  
2033  
2034  
2035  
2036  
2037  
2038  
2039  
2040  
2041  
2042  
2043  
2044  
2045  
2046  
2047  
2048  
2049  
2050  
2051  
2052  
2053  
2054  
2055  
2056  
2057  
2058  
2059  
2060  
2061  
2062  
2063  
2064  
2065  
2066  
2067  
2068  
2069  
2070  
2071  
2072  
2073  
2074  
2075  
2076  
2077  
2078  
2079  
2080  
2081  
2082  
2083  
2084  
2085  
2086  
2087  
2088  
2089  
2090  
2091  
2092  
2093  
2094  
2095  
2096  
2097  
2098  
2099  
2100  
2101  
2102  
2103  
2104  
2105  
2106  
2107  
2108  
2109  
2110  
2111  
2112  
2113  
2114  
2115  
2116  
2117  
2118  
2119  
2120  
2121  
2122  
2123  
2124  
2125  
2126  
2127  
2128  
2129  
2130  
2131  
2132  
2133  
2134  
2135  
2136  
2137  
2138  
2139  
2140  
2141  
2142  
2143  
2144  
2145  
2146  
2147  
2148  
2149  
2150  
2151  
2152  
2153  
2154  
2155  
2156  
2157  
2158  
2159  
2160  
2161  
2162  
2163  
2164  
2165  
2166  
2167  
2168  
2169  
2170  
2171  
2172  
2173  
2174  
2175  
2176  
2177  
2178  
2179  
2180  
2181  
2182  
2183  
2184  
2185  
2186  
2187  
2188  
2189  
2190  
2191  
2192  
2193  
2194  
2195  
2196  
2197  
2198  
2199  
2200  
2201  
2202  
2203  
2204  
2205  
2206  
2207

*Fig. 1*

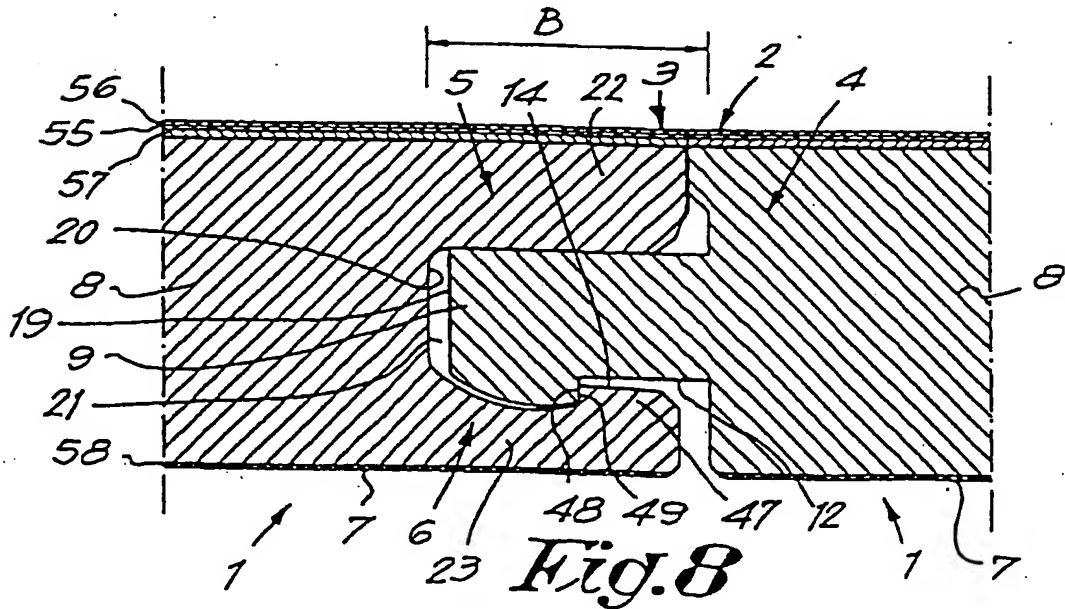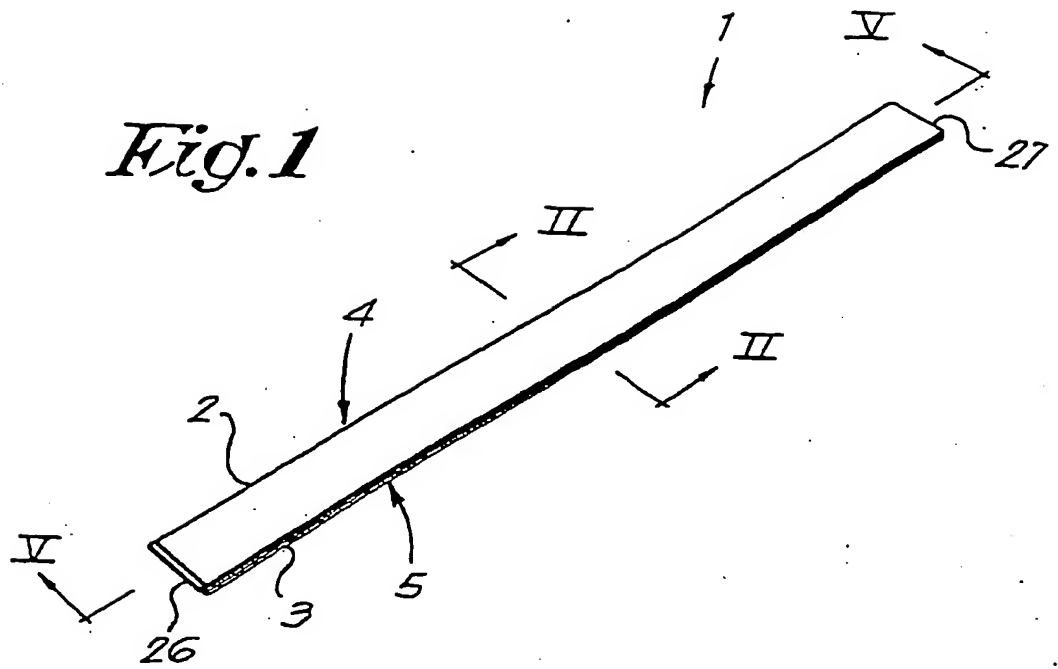

Our Ref:7465193

P/00/011  
Regulation 3:2

AUSTRALIA

---

Patents Act 1990

---

**ORIGINAL  
COMPLETE SPECIFICATION  
STANDARD PATENT**

Applicant(s):

Unilin Beheer B.V.  
Hoogeveeneweg 28  
LV Nieuwerkerk aan de IJssel NL-2913  
The Netherlands

Address for Service:

DAVIES COLLISON CAVE  
Patent & Trade Mark Attorneys  
Level 10, 10 Barrack Street  
SYDNEY NSW 2000

Invention Title:

Floor covering, consisting of hard floor panels and method for  
manufacturing such floor panels.

The following statement is a full description of this invention, including the best method of  
performing it known to me:-

Floor covering, consisting of hard floor panels and method for manufacturing such floor panels.

---

- 5 This invention relates to a floor covering, consisting of hard floor panels, as well as to a method for manufacturing such floor panels.

10 In first instance, the invention is intended for so-called laminated floors, but generally it can also be applied for other kinds of floor covering, consisting of hard floor panels, such as veneer parquet, prefabricated parquet, or other floor panels which can be compared to laminated floor.

15 It is known that such floor panels can be applied in various ways.

20 According to a first possibility, the floor panels are attached at the underlying floor, either by glueing or by nailing them on. This technique has as a disadvantage that it is rather complicated and that subsequent changes can only be made by breaking out the floor panels.

25 According to a second possibility, the floor panels are installed loosely onto the underground, whereby the floor panels mutually match into each other by means of a tongue and groove coupling, whereby mostly they are glued together in the tongue and groove, too. The floor  
30 obtained in this manner, also called a floating parquet flooring, has as an advantage that it is easy to install and that the complete floor surface can move which often is convenient in order to receive possible expansion and shrinkage phenomena.

35 A disadvantage with a floor covering of the above-

mentioned type, above all, if the floor panels are installed loosely onto the underground, consists in that during the expansion of the floor and its subsequent shrinkage, the floor panels themselves can drift apart, as a result of which undesired joints can be formed, for example, if the glue connection breaks.

In order to remedy this disadvantage, techniques have already been thought of whereby connection elements made of metal are provided between the single floor panels in order to keep them together. Such connection elements, however, are rather expensive in manufacturing them and, furthermore, their provision or the installation thereof is a time-consuming occupation.

Examples of embodiments which apply such metal connection elements are described, among others, in the documents WO 94/26999 and WO 93/13280.

Furthermore, couplings are known which allow to snap floor parts into each other, a.o. from the documents WO 94/1628, WO 96/27719 and WO 96/27721. The snapping-together effect obtained with these forms of embodiment, however, does not guarantee a 100-percent optimum counteraction against the development of gaps between the floor panels, more particularly, because in fact well-defined plays have to be provided in order to be sure that the snapping-together is possible.

From GB 424.057, a coupling for parquetry parts is known which, in consideration of the nature of the coupling, only is appropriate for massive wooden parquetry.

Furthermore, there are also couplings for panels known from the documents GB 2.117.813, GB 2.256.023 and DE 3.544.845. These couplings, however, are not appropriate

for connecting floor panels.

The invention aims at an improved floor covering of the aforementioned type, the floor panels of which can be coupled to each other in an optimum manner and/or the floor panels of which can be manufactured in a smooth manner, and whereby preferably one or more of the aforementioned disadvantages are excluded.

The invention also aims at a floor covering which shows the advantage that no mistake during installation, such as gaps and such, can be created.

Furthermore, the invention also aims at a floor covering whereby the subsequent development of gaps is excluded or at least counteracted in an optimum manner, whereby also the possibility of the penetration of dirt and humidity is minimalized.

To this aim, the invention relates to a floor covering, consisting of hard floor panels which, at least at the edges of two opposite sides, are provided with coupling parts, co-operating with each other, whereby the coupling parts are provided with integrated mechanical locking means made in one piece with the panels which prevent the drifting apart of two coupled floor panels into a direction perpendicular to the related edges and parallel to the underside of the coupled floor panels, characterized in that the coupling parts are provided with means which, in

the engaged condition of two or more of such floor panels, exert a tension force upon each other which forces the floor panels at least in the direction of their planes towards each other.

As a result of this is effected that not only during installing the formation of gaps is counteracted, but also in a later stage the development of gaps, as a result of which causes whatsoever, is counteracted.

Due to the fact that the coupling parts provide for an interlocking free from play, as well due to the fact that these coupling parts are manufactured in one piece, from the basic material of the floor panels, a perfect connection between adjacent floor panels can always be guaranteed, even with repeated expansion and shrinkage of the floor surface.

According to a preferred embodiment, the panels are rectangular and the coupling parts providing in said tensioning force are provided at both pairs of edges, resulting in that each panel is always closely fitting to each of the surrounding panels.

Particular forms of embodiment are described in the enclosed dependent claims 2 to 10.

Further the invention also aims a floor covering, consisting of hard floor panels provided with coupling



parts at at least one pair of edges, which due to particular combinations of features provide in an improved result. To this aim, the invention also relate to floor coverings as described in the enclosed independent, and further also dependent claims 11 to 88.

In the most preferred embodiments, for the basic material use shall be made of a ground wood-based product which by means of a binding agent is composed to a single compound. More particularly, for the core use shall be made of finely-ground wood which preferably is glued, more particularly, watertight glued. Still more particularly, for the core use shall be made of so-called HDF board (High Density Fibreboard) or MDF (Medium Density Fibreboard).

The fact that the invention is applied to floor panels the basic material of which consists of the material described above, offers the advantage that with the processing of this material, very smooth surfaces are obtained whereby very precise couplings can be realized, which in first instance, is important in the case of a snap-together connection and/or turning connection free from play. Also, very special forms of coupling parts can be manufactured in a very simple manner because the aforementioned kinds of material can be processed particularly easy.

The surfaces obtained with HDF and MDF also have the advantage that the floor panels mutually can fluently be shifted alongside each other in interlocked condition, even when engaged with a tensioning force.

The inventor also found out that the aforementioned materials, in particular HDF and MDF, show ideal features in order to realize a connection, such as mentioned above, as these materials show the right features in respect to elastic deformation in order to, on one hand, realize a snap-together effect, and, on the other hand, receive expansion and shrinkage forces in an elastic manner, whereby it is avoided that the floor panels come unlocked or are damaged in an irreparable manner.

In the case that for the core use is made of a material based on synthetic material, to this end solid synthetic material can be used as well as a mixture of synthetic materials, eventually composed of recycled materials.

The floor covering preferably is formed by joining the floor panels into each other free of glue. Hereby, the connections are of such nature that the floor panels can be disassembled without being damaged, such that, for example, when moving, they can be taken along in order to be placed again. It is, however, clear that a glueing between tongue and groove is not excluded.

The joining together of the panels, in other words the assembling of the floor, is preferably realized according to one of the methods described in the enclosed claims 89 to 98.

The invention, of course, also relates to floor panels which allow the realization of the aforementioned floor

covering, as well as the realization of the aforementioned methods.

The invention further relates to a method for the manufacturing of the aforementioned floor panels which shows the advantage that the tongues and/or grooves, including the corresponding locking means, can be provided at the floor panels at high production speeds without problems. More particularly, it aims at a method which allows that the rather complicated forms of the tongue and the groove of the aforementioned floor panels can be realized, such that the use of small milling cutters, for example finger cutters, with diameters smaller than the depth of the tongue or groove can be excluded.

This method shows the features as described in claim 99. According to this method, the tongue and/or groove is realized by means of a milling process with at least two subsequent milling cycles by means of milling cutters which are positioned in different angles in respect to the related floor panel.

Particular forms of embodiment of this method are described in the dependent claims 101 to 105.

With the intention of better showing the characteristics according to the invention, in the following, as an example without any limitative character, several preferred forms of embodiment are described, with reference to the accompanying drawings, wherein:

5 figure 1 represents a floor panel of a floor covering according to the invention;

figure 2, on a larger scale; represents a cross section according to line II-II in figure

1;

10 figures 3 and 4 represent how two floor panels with coupling parts according to figure 2 match into each other;

figure 5, on a larger scale, represents a cross section according to line V-V in figure

1;


15

figures 6 and 7 represent how two floor panels with coupling parts according to figure 5 match into each other;

figures 8 to 11 represent a number of variants of coupling parts of floor panels;

20

figure 12 schematically represents how the floor parts can be provided with coupling parts;



- 9 -

figure 13 represents a cross-section according to line XIII-XIII in figure 12;

figures 14 to 21, on a larger scale and in cross section, represent the penetration of the milling cutters which are indicated in figure 12 with arrows F14 to F21;

5

figure 22 represents a floor panel according to the invention;

figure 23, on a larger scale, represents the coupling of two floor panels of figure 22;

10

figures 24 and 25 represent two manners of coupling floor panels according to figure 22 to each other.

The invention relates to a floor covering which is composed of hard floor panels 1, for example, such as shown in figure 1.

15

These floor panels 1 can be of various shape, for example, rectangular or square, or of any other shape.

In the most preferred form of embodiment, they shall be manufactured in an elongated form, such as shown in figure 1, for example, with a length of 1 to 2 meters. The thickness, however, can also vary, but is preferably

0,5 to 1,5 cm, and more particularly 0,8 cm.

Each floor panel 1 is, at least at the edges of two opposite sides 2-3, provided with coupling parts 4-5 which allow that two adjacent floor panels 1 can be coupled to each other.

According to the invention, the coupling parts 4-5, as represented in the figures 2 to 4, are provided with integrated mechanical locking parts 6 which prevent the drifting apart of two coupled floor panels 1 into a direction D perpendicular to the respective sides 2-3 and parallel to the underside 7 of the coupled floor panels 1; the coupling parts 4-5 and the locking means 6 are realized in one piece with the core 8 of the floor panels 1; the coupling parts 4-5 have such a shape that two subsequent floor panels 1 can be engaged into each other exclusively by snapping-together and/or turning, whereby each subsequent floor panel 1 can be laterally inserted into the previous; and the coupling parts 4-5 preferably provide in an interlocking free from play according to all directions in the plane which is situated perpendicular to the aforementioned edges.

In the case of floor panels 1 with an elongated shape, as represented in figure 1, the respective coupling parts 4-5 are situated at the longitudinal sides 2-3.

The coupling parts 4-5 can be realized in various forms, although the basic forms thereof will always be formed by a tongue 9 and a groove 10.

In the form of embodiment of figures 2 to 4, the related floor panel 1 is provided with coupling parts 4-5 and locking means 6 which allow to mutually engage two floor panels 1 by means of a turning movement, without the

occurrence of any snap-together effect.

5 In the represented example, the locking means 9 consist of a first locking element 11, formed by a protrusion with a bent round shape at the lower side 12 of the tongue 9, and a second locking element 13, formed by a recess with a bent hollow shape in the lower wall 14 of the groove 10.

10 The locking elements 11-13 provide for that two floor panels 1 which are coupled to each other can not perform a lateral movement in the horizontal plane in respect to each other.

15 In order to obtain that two floor panels 1 can be inserted into each other by means of a turning movement, the curvatures preferably are circle-shaped. The bottom side 12 has a curvature with a radius  $R_1$ , the center of which coincides with the related upper edge 15 of the floor panel 1, whereas the lower wall 14 shows a curvature with a radius  $R_2$  which is equal to the radius  $R_1$ , but whereby its center coincides with the related upper edge 16. Radii  $R_1$  and  $R_2$  may also be applied which are larger or smaller than the distance to the upper edge 15, 16 respectively, and/or which differ from each other in size.

20 The upper side 17 of the tongue 9 and the upper wall 18 of the groove 10 are preferably flat and preferably are situated in the horizontal plane.

25 The front sides 19 and 20 of the tongue 9 and the groove 10 of two interlocked floor panels 1 preferably do not fit closely against each other, such, that in between an intermediate space 21 is created into which possible dust remainders or such can be pushed away by means of the

tongue 9.

The tongue 9 and the groove 10 preferably have shapes which are complementary to each other, such that the tongue 9 in the engaged condition of two floor panels 1 precisely sits against the upper wall 18 and the lower wall 14 of the groove 10, whereby a pressure P, executed onto the upper lip 22, is received not only by this lip 22, but by the complete structure, because this pressure can be transmitted through the tongue 9 and the lower lip 23.

It is, however, clear that a number of minor deviations to these complementary forms can occur which, anyhow, have no or almost no effect upon the receipt and transmission of pressure forces. For example, a chamfer 24 and a recess 25 can be provided, as represented in figures 2 to 4, as a result of which is obtained that the subsequent floor panels 1 can easily be pushed into each other, such that no possible ridges or such render the good insertion difficult.

As represented in the figures 5 to 7, the floor panels 1 according to the invention can also, along the sides 26-27 which are at a right angle to the sides 2-3, be provided with coupling parts 28-29 which have locking means 30, too. The coupling parts 28-29 are preferably also realized in the shape of a tongue 31 and a groove 32. Hereby, the locking means 30 do not have to be of the same nature as the locking means 6.

Preferably, at the sides 26-27 locking means are applied which allow for an engagement and interlocking by means of a translation movement T only, as represented in figures 6 and 7. To this aim, the locking means 30 consist of a snap-together connection with locking



elements 33 and 34 which grip behind each other.

As represented in figures 5 to 7, the locking element 33 preferably consists of a protrusion of the lower side 35 of the tongue 31 which can take place in a recess 36 in the lower wall 37 of the groove 32. The locking element 34 is formed by the upward directed part which limits the recess 36.

In this case, the locking elements 33-34 have contact planes 38-39 which are parallel to each other and preferably extend in an inclined manner, according to a direction which simplifies the snapping-together. The tangent line L which is determined by the contact planes 38-39, hereby forms an angle A with the underside 7 which is smaller than  $90^\circ$ .

The locking elements 33-34 preferably are provided with inclined portions 40 and 41 which, when engaging two floor panels 1, cooperate with each other in such a manner that the locking elements 33-34 can easily be pushed over each other until they grip behind each other by means of a snap-together effect.

The thickness W1 of the tongue 31 preferably is equal to the width W of the groove 32, such that the upper lip 42, when exerting a pressure P, is supported by the tongue 31 which, in its turn, then is supported by the lower lip 43.

Analogous to the chamfer 24 and recess 25, a recess 44 and a chamfer 45 are provided also at the edges 28-29.

It is noted that such a snap-together coupling can also be applied at the edges 2-3. Hereby, this can be a snap-together coupling analogous to these of figures 5 to 7,

but this can also be a snap-together coupling whereby other forms of coupling parts are applied, for example, such as represented in figures 8 and 9. Contrary to the locking elements 33-34 which consist of rather local protrusions, in the forms of embodiment of figures 8 and 9 use is made of locking elements 46-47 which, in comparison to the total width B of the coupling, extend over a rather large distance.

10 In this case, the locking elements 46-47 are also provided at the lower side 12 of the tongue 9 and the lower wall 14 of the groove 10.

15 According to figure 8, the locking elements 46-47 have contact surfaces 48-49 which are at an angle with the plane of the floor panel 1. Hereby, a coupling is obtained which is interlocked in a particularly fixed manner.

20 As represented in figure 9, the locking elements 46-47 possibly can be realized in such a manner that substantially only a linear contact is obtained, for example, because the contact surfaces directed towards each other are realized with different curvatures.

25 The surfaces, directed towards each other, of the locking elements 46-47 hereby consist of bent surfaces. The tangent line L forms an angle A which is smaller than  $90^\circ$ , and even better is smaller than  $70^\circ$ .

30 Hereby, the locking element 46 preferably has two portions with a different curvature, on one hand, a portion 50 with a strong curvature and, on the other hand, a portion 51 with a weak curvature. The portion 50 with the strong curvature provides for the formation of a firm coupling. The portion 51 with the weak curvature

allows that the coupling parts 4-5 can be brought into each other easily. The intermediate space *S* forms a chamber which offers space for dust and similar which, when engaging two floor panels 1, gets there eventually.

5

In the case of a snap-together connection, for example, a connection, such as represented in figures 7 to 9, preferably always the tongue 9-31 has a shape, thickening towards below, which can cooperate with a widened portion in the groove 10.

10

In figure 10, a variant is represented whereby at least at the height of the upper edges 15-16, a sealing material 52 is provided, as a result of which a watertight sealing can be guaranteed. This sealing material 52 may consist of a strip or covering which is provided previously at the floor panel 1, either at one or both upper edges 15-16.

15

In figure 11, a further variant is represented, whereby the locking means 6 are formed by an upward directed portion 53 at the tongue 9 which, as a result of a turning movement, is brought behind a downward-directed portion 54 at the upper wall 18. More particularly, this is obtained by realizing the upper side 17 and the upper wall 18 with a curvature  $R_3$ , the center of which is situated at the edges 15-16, and realizing the lower side 12 and the lower wall 14 with a radius  $R_4$ , the center of which is also situated at the upper edges 15 and 16, respectively. These radii  $R_3$ - $R_4$  can be chosen otherwise, too.

20

25

30

In general, according to the invention, the difference between, on one hand, the radius  $R_1$ ,  $R_3$  respectively, and, on the other hand, the radius  $R_2$ ,  $R_4$  respectively, preferably should not be larger than 2 mm.

35

It is also preferred that the center of these radii is situated inside the circle C1, C2 respectively, which extends with a radius R5 of 3 mm around the upper edge 15, 16 respectively, such as, for example, indicated in figure 2.

Finally is noted that, according to the invention, the lower lip 23-43, as represented in figures 2 to 7, can be realized longer than the upper lip 22-42. This has as an advantage that the coupling parts 4-5-28-29 can be realized in an easier manner by means of a milling cutter or such. Furthermore, this simplifies the engagement of two floor panels 1, because each subsequent floor panel 1 during installation can be placed upon the protruding lower lip 23-43, as a result of which the tongue 9-31 and the groove 10-32 automatically are positioned in front of each other.

The embodiments whereby the lower lip 23 is equal to or shorter than the upper lip 22, in their turn, offer the advantage that no protruding lip 23 remains at the extreme edge of the floor which might cause problems in the finishing.

In order to allow for a smooth assembly, in order to guarantee the necessary stability and firmness and in order to limit the quantity of material to be cut away, the difference E between the upper lip 22-42 and the lower lip 23-43, measured in the plane of the floor panel and perpendicular to the longitudinal direction of the groove 10, should preferably be kept smaller than one time the total thickness F of the floor panel 1. For stability's sake, normally this total thickness F shall never be less than 5 mm.

The small dimension of the difference E offers the

advantage that the lower lip must not be strengthened by a reinforcement strip or the like.

According to a particular form of embodiment, the central line M1 through the tongue 9 and the groove 10 is situated lower than the center M2 of the floor panel 1, such, that the upper lip 22-42 is thicker than the lower lip 23-43. In first instance, this is essential in this kind of connections, because then it is the lower lip 23-43 which bends, such that the upper side of the floor panel 1 is kept free of possible deformations.

As explained in the introduction, for the core 8 a material is chosen from the following series:

- a ground product which, by means of a binding agent or by means of melting together, is composed to a single compound;
- a product based on synthetic material;
- chip board with fine chips.

The invention shows its usefulness, in first instance, preferably with laminated flooring, due to the reasons explained in the introduction.

As represented in the examples of the figures 2 to 11, such laminated flooring preferably consists of a core 8 made of MDF board, HDF board or similar, whereby at least at the upper side of this core 8 one or more layers of material are provided.

More particularly, it is preferred that the laminated flooring is provided with a decorative layer 55 and a protective top layer 56. The decorative layer 55 is a layer, impregnated with resin, for example, made of paper, which can be imprinted with a variety of patterns, such as a wood pattern, a pattern in the form of stone,

cork, or similar or even with a fancy pattern. The protective top layer 56 preferably also consists of a layer saturated with resin, for example, melamine resin, made of a transparent material.

5

It is clear that still other layers can be applied, such as an intermediate layer 57 upon which the decorative layer 55 is provided.

10

Preferably, also a backing layer 58 shall be applied at the underside 7, forming a counterbalancing element for the top layers and, thus, guaranteeing the stability of the form of the floor panel 1. This backing layer 58 may consist of a material, for example paper, impregnated with a resin, for example, a melamine resin.

15

As represented schematically in figure 12, the tongue 9 and the groove 10, and preferably also the tongue 31 and the groove 32 are applied by means of a milling process.

20

In the case that a profile has to be applied on all four sides, the floor panels 1 preferably shall be displaced by means of two perpendicular movements V1 and V2, whereby during the first movement profiles at two opposite edges are provided, in this case the longitudinal edges, by means of milling devices 59-60, whereas during the second movement profiles are provided at the other edges, in this case the small edges, by means of milling devices 61-62. During these processing, the floor panels 1 preferably are put with their decorative layer directed downward.

25

30

According to an important characteristic of the invention, each respective tongue 9-31 and groove 10-32 are realized by means of a milling process with at least two subsequent milling cycles by means of milling cutters which are positioned at different angles in reference to

35

the related floor panel 1.

This is illustrated in figures 13, 14 and 15, wherein it is represented how a groove 10 is realized by means of two milling cycles by means of two milling cutters 63 and 64. Figures 16 and 17 represent how the tongue 9 is realized by means of milling cutters 65 and 66.

The figures 18-19 and 20-21 represent similar views showing how the groove 32 and the tongue 31 are realized by means of milling cutters 67-68 and 69-70, positioned at an angle.

During each of the aforementioned milling cycles, each time substantially the final shape of one flank is realized. For example, the milling cutter 63 of figure 14 determines the final shape of the lower flank 71 of the groove 10, whereas the milling cutter 64 determines the final shape of the upper flank 72.

As mentioned in the introduction, preferably milling cutters 63 to 72 shall be applied, having diameters  $G$  which are at least 5 times, and even better at least 20 times larger than the thickness  $F$  of the floor panels 1.

Apart of the mentioned milling cutters, preferably still other milling cutters are applied, for example, in order to remove a part of the material to be removed already during a first premachining cycle.

In the figures 22 to 25, a particularly preferred form of embodiment of a floor panel 1 according to the invention is represented. Hereby, the parts which are taken over from the foregoing forms of embodiment are indicated with corresponding references.

An important characteristic herein consists in that the coupling parts 4-5 are provided with locking means 6 which, in engaged condition, exert a tension force upon each other, as a result of which the engaged floor portions 1 are forced towards each other. As represented, this is realized preferably by providing the coupling parts with an elastically bendable portion, in this case the lip 43, which, in engaged condition, is at least partially bent and in this way creates a tension force which provides for that the engaged floor panels 1 are forced towards each other. The hereby resulting bending V, as well as the tension force K resulting herefrom, are indicated in the enlargement of figure 23.

In order to obtain that the tension force K results in pressing together the engaged floor panels 1, the bendable portion, in this case the lip 43, preferably is provided, as represented, with an inwardly inclined contact surface 73 which preferably can cooperate with a corresponding contact surface 74. These contact surfaces 73-74 are similar to the aforementioned contact surfaces 39-38 and also similar to the inclined portions of the lower lip of figures 2 to 4.

In the figures 2 and 5, the portions form complementary matching shapes; it is, however, clear that, by a modification, also a tension effect similar as in figure 23 can be realized.

Due to, on one hand, the contact under the angle A, and, on the other hand, the fact that a tension force K is created, a force component K1 is effected, as a result of which the floor panels 1 are drawn against each other.

Preferably, the angle A of the contact surfaces 73-74 in respect to the horizontal plane is situated between 30



and 70 degrees. In first instance in the case that use is made of the embodiment whereby a tension force  $K$  is realized, an angle  $A$  of 30 to 70 degrees is ideal in order, on one hand, to effect an optimum pressing-together of the floor panels 1 and, on the other hand, to obtain that the floor panels 1 can easily be engaged, respectively disassembled.

Although the pressing force  $K_1$  preferably is delivered by the aforementioned lip 43, the invention does not exclude other forms of embodiment whereby this force is delivered by other bendable portions.

It is noted that the bending  $V$  is relatively small, for example, several hundredths up to several tenths of a millimeter, and does not have an influence upon the placement of the floor covering. Furthermore is noted that such floor covering generally is placed upon an underlayer which is elastically compressible, as a result of which the bending  $V$  of the lip 43 exclusively results in the fact that the underlayer locally is compressed somewhat more.

Due to the fact that the lip 43 is bent apart and that it remains somewhat bent apart in engaged position, also the advantage is effected that, when exerting a pressure upon the floor covering, for example, when placing an object thereupon, the pressing-together force is enhanced and, thus, the development of gaps is counteracted even more.

It is noted that the inventor has found that, contrary to all expectations, an ideal tension force can be realized by manufacturing the coupling parts 4-5, including the locking elements 33-34, and preferably the complete core 8, of HDF board or MDF board, although these materials only allow a minor elastic deformation.

HDF and MDF also offer the advantage that smooth surfaces are obtained, as a result of which the locking elements can be moved easily over each other.

- 5 According to a variant of the invention, the tension force can also be delivered by means of an elastic compression of the material of the coupling parts, to which end these coupling parts, and preferably the complete core 8, then have to be manufactured in an  
10 elastically compressible material.

- A further particular characteristic of the embodiment of figures 22 to 25 consists in that the floor panels 1 can be engaged by means of a turning movement, as represented  
15 in figure 24, as well as by means of shifting them towards each other, as represented in figure 25, preferably in such a manner that, during the engagement by means of the turning movement, a maximum bending  $V_m$  results in the coupling parts, more particularly in the  
20 lip 43, which bending  $V_m$  is less pronounced, if not non-existent, as in the figures 2 to 4, in comparison to the bending  $V_m$  which results when the floor panels 1 are engaged by means of shifting them towards each other.

- 25 The advantage of this consists in that the floor panels 1 can be engaged easily by means of a turning movement, without necessitating a tool therefore, whereas it still remains possible to engage the floor panels also by means of shifting them. This latter is useful, in first  
30 instance, when the last panel has to be placed partially under a door frame or similar. In this case, the floor panel 1 can be pushed under the door frame with the side which does not have to be engaged and subsequently, possibly by means of tools, can be snapped into the  
35 adjacent floor panel 1.

It is noted that the shapes of the coupling parts 4-5 shown in figures 22 to 25 can also be used for the coupling parts 28-29 of the short sides.

5 According to the invention, in the case that the four sides 2-3-26-27 are provided with coupling parts 4-5-28-29, these coupling parts can be realized in such a manner that in one direction a firmer engagement than in the other direction is effected. In the case of elongated  
10 floor panels 1, for example, such as represented in figure 1, the locking at the small sides 26-27 preferably shall be more pronounced than at the longitudinal sides 2-3. The length of the coupling at the small sides, namely, is smaller and, in principle, less firm. This is  
15 compensated by providing in a more pronounced locking.

This difference in engagement can be obtained by realizing the contact surfaces 73-74 under different angles.

20 Preferably, the aforementioned protrusion, more particularly the locking element 33, is bordered by at least two portions 75-76, respectively a portion 75 with a strong inclination which provides for the locking, and  
25 a portion 76 with a weaker inclination which renders the engagement of the coupling parts easier. In the embodiment of figures 22 to 25, these portions 75-76 are formed by straight planes, but, as already described in reference to figure 9, use can also be made of curved  
30 portions 50-51. In figure 5, these are the contact surface 38 and the inclined portion 40.

In the preferred form of embodiment, the floor panels 1 according to the invention comprise coupling parts 4-5  
35 and/or 28-29 showing one of the following or the combination of two or more of the following features:

- a curvature 77 at the lower side of the tongue 9 and/or a curvature 78 at the lip 43 which form a guidance when turning two floor panels 1 into each other, with the advantage that the floor panels 1 can be engaged into each other easily during installing;
- roundings 79-80 at the edges of the locking elements 33-34, with the advantages that the locking elements can easily shift over each other during the engagement, respectively disassembly of the floor panels 1 and that the locking elements are not damaged, for example, crumble away at their edges, even if the floor panels are engaged, respectively disassembled, repeatedly;
- dust chambers 81, or spaces 21 as in figure 4, between all sides, directed laterally towards each other, of the engaged floor panels 1, with the advantage that inclusions which get between the floor panels 1 during the engagement do not exert a disadvantageous influence upon the good engagement;
- a shaping of the tongue 9 which is such, for example, by the presence of a chamfer 82, that the upper side of the tongue 9 already with the first contact becomes situated under the lower side of the upper lip 42 when the floor panels 1 are pushed towards each other at the same level, as indicated in figure 25, with the advantage that the front extremity of the tongue 9 does not press against the front side of the upper lip 42 when the floor panels are pushed towards each other at the same level;
- a ramp surface 83, hereinbefore also called inclined portion 41, formed at the free extremity of the lower lip 43, with the advantage that the locking elements 33-34 shift smoothly over each other and that the lower lip 43 is bent uniformly;
- in the engagement direction only one important contact point which is formed by a section 84 at the

location of the top side of the floor panels 1, with the advantage that the aforementioned tension force is optimally transferred to the upper side of the floor panels 1 and that the development of openings between the floor panels 1 is counteracted;

- contact surfaces 85-86, more particularly abutment surfaces, formed by the upper side of the tongue 9 and the upper side of the groove 10 which, over the largest portion of their length, run parallel to the plane which is defined by the floor panels 1, as well as contact surfaces cooperating with each other, formed by curvatures 77-78, with the advantage that no mutual displacement in height between two engaged floor panels 1 is possible, even if the insertion depth of the tongue 9 into the groove 10 should vary due to which causes whatsoever, in other words, that no height differences may occur between the adjacent floor panels.

In the form of embodiment of figures 22 to 25, all these characteristics are combined; it is, however, clear that, as becomes evident from figures 2 to 11, these features can also be present separately or in a limited combination.

As becomes evident from figures 5 to 7 and 22 to 25, an important characteristic of the preferred form of embodiment of the invention consists in that the locking means 6, in other words, the portion providing for the snap-together and engagement effect, are situated in that portion of the lower lip 23-43 which extends beyond the upper lip 22-42, more particularly, that the lowermost point 87 of the locking part 33 is situated under the top layer of the floor panel 1. For clarity's sake, this top layer is indicated in the figures 22 to 25 only as a single layer.

It is noted that the combination of features, that the lower lip 23-43 extends further than the upper lip 22-42, that the locking means 6 are formed at least by means of a portion which inwardly slopes downward, and that this  
 5 portion, at least partially, is located in the portion of the lower lip 23-43 which extends beyond the upper lip 22-42, is particularly advantageous, among others, in comparison with the couplings for floor panels described in the documents WO 94/01628, WO 94/26999, WO 96/27719  
 10 and WO 96/27721. The sloping portion offers the advantage that the floor panels 1 can be disassembled again. The fact that this sloping portion is situated in the further extending portion of the lower lip 23-43 additionally to this offers the advantage that no deformations can occur  
 15 during coupling which manifest themselves up to the top layer.

According to a preferred characteristic of the invention, the aforementioned portion, i.e. the contact surface 39  
 20 or 73, preferably extends in such a manner that the distance up to the upper edge 16 diminishes from below in upward direction, in other words, such that, as represented in figure 22, the distance X2 is smaller than the distance X1. This is also the case in figure 7.

25 Still preferably, this portion only starts at a clear distance E1 from the upper lip 42.

30 It is obvious that the coupling parts 22 to 25 can also be realized by means of said milling process.

According to a particular characteristic of the invention, the floor panels 1 are treated at their sides 2-3 and/or 26-27 with a surface densifying agent, more  
 35 particularly a surface hardening agent, which preferably is chosen from the following series of products:

impregnation agents, pore-sealing agents, lacquers, resins, oils, paraffines and similar.

5 In figure 22, such impregnation 88 is represented schematically. This treatment can be performed over the complete surface of the sides 2-3 and/or 26-27 or only over well-defined portions hereof, for example, exclusively the surfaces of the tongue 9 and the groove 10.

10

The treatment with a surface densifying agent offers, in combination with the snap-together effect, the advantage that in various aspects better coupling features are obtained. As a result of this, the coupling parts 4-5 and/or 28-29 better keep their shape and strength, even if the floor panels 1 are engaged and disassembled repeatedly. Especially in the case that for the core 8 use is made of HDF, MDF or similiar, by means of this treatment such a better quality of surface condition is  
15 obtained, that no abrasion of material occurs during engaging, respectively during disassembling.

20

This treatment also offers the advantage that, at least in the case of a surface hardening, the aforementioned  
25 elastic tensioning effect is enhanced.


The present invention is in no way limited to the forms of embodiment described by way of example and represented in the figures, however, can such floor covering and the  
30 pertaining floor panels 1 be realized in various forms and dimensions without leaving the scope of the invention.

For example, the various characteristics which are  
35 described by means of the represented forms of embodiment, may be combined with each other or not.

- 28 -

Furthermore, all embodiments of coupling elements described before can be applied at the longer side as well as the shorter side.

Throughout this specification and the claims which follow, unless the context requires  
5 otherwise, the word "comprise", "consisting of" and variations such as "comprises" or  
"comprising" , will be understood to imply the inclusion of a stated integer or step or group  
of integers or steps but not the exclusion of any other integer or step or group of integers or  
steps.





THE CLAIMS DEFINING THE INVENTION ARE AS FOLLOWS :

- 1.- Floor covering, consisting of hard floor panels which, at least at the edges of two opposite sides, are provided with coupling parts, co-operating with each other, whereby the coupling parts are provided with integrated mechanical locking means made in one piece with the panels which prevent the drifting apart of two coupled floor panels into a direction perpendicular to the related edges and parallel to the underside of the coupled floor panels, characterized in that the coupling parts are provided with means which, in the engaged condition of two or more of such floor panels, exert a tension force upon each other which forces the floor panels at least in the direction of their plane towards each other.
- 2.- Floor covering according to claim 1, characterized in that the coupling parts are substantially in the form of a tongue (9-31) and a groove (10-32).
- 3.- Floor covering according to claim 1 or 2, characterized in that the means which exert said tension force comprise an elastically bendable portion which, in the engaged condition, is at least partially bent out and in this manner provides the aforementioned tension force.
- 4.- Floor covering according to claim 2 or 3, characterized in that in the engagement direction, apart from a contact formed by contact surfaces (38-39, 73-74) delivering the tension force, there exists only one substantial contact point between two coupled floor panels (1), which is formed by a section (84) at the location of the top side of the floor panels (1).

5.- Floor covering according to any of the claims 2 to 4, characterized in that the elastically bendable portion consists of a lip, preferably the lip (23-43) limiting the lower side of the aforementioned groove (10).

6.- Floor covering according to claim 5, characterized in that the bendable portion which is bent out in coupled condition is formed by the lower lip (23-43) of said groove (10-32) whereby this lip (23-43) in coupled condition is bent out only downwardly.

7.- Floor covering according to claim 5 or 6, characterized in that the bendable portion is provided with a contact surface (39-73) which inwardly slopes downward.

8.- Floor covering according to any of the claims 2 to 7, characterized in that the locking means (6) comprise, at a first edge (2-27), a recess (13-36) in said lip, more particularly in said lower lip (23-43), and at a second edge (3-26), opposite to the first edge, a protrusion which in coupled condition of two panels (1) co-operates with the recess of the other panel, said recess and protrusion defining contact surfaces (38-39, 73-74) the contact of which results in said tension force, whereby the tongue (9-31) and groove (10-32) have a shape such that in coupled condition of two floor panels (1) there exists a chamber (81) between those sides of the protrusion and the recess (36) that are located opposite to the side at which the contact surfaces (39-73) are formed.

9.- Floor covering according to any of the preceding claims, characterized in that the panels (1) have a core made of HDF board or MDF board, whereby said coupling means, inclusive said bendable portion, are substantially

formed out of said board such that the tension force is delivered by the elasticity of the HDF or MDF.

10.- Floor covering according to any of the preceding claims, characterized in that the panels (1) are rectangular; in that the panels (1) are provided with coupling parts and locking means (6) at both pairs of opposite edges; and in that the means providing in the tension force are integrated at both pairs of edges which are perpendicular to each other, such that the panels (1) in engaged condition are forced to each other at all coupled edges.

11.- Floor covering, consisting of hard floor panels having a wood-based core, said panels being provided, at least at the edges of two opposite sides, with coupling parts formed in one piece with said wood-based core and co-operating with each other, substantially in the form of a tongue and a groove, characterized in that the coupling parts are provided with integrated mechanical locking means, also made in one piece with said core, which prevent the drifting apart of two coupled floor panels in a direction perpendicular to the related edge and parallel to the underside of the coupled floor panels, and in that said wood-based core consists of HDF board or MDF board.

12.- Floor covering, consisting of hard floor panels, said panels being provided, at least at the edges of two opposite sides, with coupling parts co-operating with each other, substantially in the form of a tongue and a groove, whereby the coupling parts are provided with integrated mechanical locking means which prevent the drifting apart of two coupled floor panels in a direction perpendicular to the related edge and parallel to the underside of the

coupled floor panels, characterized in that the coupling means comprise a recess in the upper side of the lower lip bordering the underside of the groove, in that the recess at the inner side of the panel is bordered by a portion which is inclined and in that said inclined portion connects to the lower surface of the groove.

13.- Floor covering according to claim 12, characterized in that the portion of the lower surface of the groove connected to the inclined surface of the recess consists of a curvature (78).

14.- Floor covering, consisting of hard floor panels, said panels being provided, at least at the edges of two opposite sides, with coupling parts co-operating with each other, substantially in the form of a tongue and a groove, whereby the coupling parts are provided with integrated mechanical locking means which prevent the drifting apart of two coupled floor panels in a direction perpendicular to the related edge and parallel to the underside of the coupled floor panels, characterized in that the coupling means comprise a recess in the upper side of the lower lip bordering the underside of the groove, and in that the coupling means are provided with a guidance provided at the portion of the upperside of the lower lip between the recess and the inside of the groove and/or at the lower side of the tongue.

15.- Floor covering according to claim 14, characterized in that said guidance is at least provided at the lower side of the tongue and comprises a curvature (77).

16.- Floor covering according to claim 14 or 15, characterized in that said guidance is at least provided at

the upper side of the lower lip and comprises a curvature (78).

17.- Floor covering, consisting of hard floor panels (1), said panels being realized as laminated flooring, comprising a wood-based core, consisting of a ground wood product which, together with a binding agent is composed to a single compound and/or is made of chip board with fine chips, whereby on this core (8) one or more layers are provided, among which a decorative layer (55) and whereby a backing layer (58) is provided at the underside (7), characterized in that the panels at least at the edges of two opposite sides (2-3, 26-27), are provided with coupling parts (4-5, 28-29), co-operating with each other, substantially in the form of a tongue (9-31) and a groove (10-32), whereby the coupling parts are provided with integrated mechanical locking means (6) made in one piece with the panels which prevent the drifting apart of two coupled floor panels into a direction (R) perpendicular to the related edges (2-3, 26-27) and parallel to the underside (7) of the coupled floor panels, and whereby said locking means (6) are obtained by means of said tongue and groove in that the tongue is provided with an upward directed portion (53), whereas the upper wall (18) of the groove is provided with a downward directed portion (54).

18.- Floor covering according to claim 17, characterized in that the groove is limited by an upper and a lower lip of substantially the same length.

19.- Floor covering according to claim 17 or 18, characterized in that the tongue and groove are circularly curved.

20.- Floor covering, consisting of hard floor panels, said panels being provided, at least at the edges of two opposite sides, with coupling parts co-operating with each other, substantially in the form of a tongue and a groove, whereby the coupling parts are provided with integrated mechanical locking means which prevent the drifting apart of two coupled floor panels in a direction perpendicular to the related edge and parallel to the underside of the coupled floor panels, characterized in that the floor panels at least at said edges are provided with a lower lip bordering the underside of the groove which extends beyond the upper lip bordering the upper side of the groove; in that the coupling means are located in the lower lip and the corresponding lower surface of the tongue; and in that the shaping of the tongue (9-31) and/or the lower lip (43) are such that the floor panels (1) can be coupled by laterally shifting them towards each other, starting from a mutual position in which the floor panels (1) at the edges to be coupled, are completely separated from each other.

21.- Floor covering according to claim 20, characterized in that the upper side of the tongue tip already at the first contact with the upper lip (42) is located underneath the upper lip (42) when the floor panels (1) are shifted towards each other.

22.- Floor covering according to claim 21, characterized in that the locking means comprise a recess in the lower lip (43) and a protrusion at the lower side of the tongue and in that the shaping of the tongue (9-31) and/or the lower lip (43) are such that the tongue tip is located underneath the upper lip (42) before the protrusion is contacting the lower lip.

23.- Floor covering according to claim 20, 21 or 22, characterized in that the locking means comprise a recess in the lower lip (43) and a protrusion at the lower side of the tongue, and in that the lower lip (43) at the free extremity thereof is provided with a ramp surface (41-83), said ramp surface (41-83) allowing that a first floor panel (1), when shifting it over the floor to a second floor panel (1), is guided with its protrusion over said ramp surface.

24.- Floor covering, consisting of hard floor panels (1) which, at least at the edges of two opposite sides (2-3, 26-27), are provided with coupling parts (4-5, 28-29), co-operating with each other, substantially in the form of a tongue (9-31) and a groove (10-32), whereby the coupling parts are provided with integrated mechanical locking means (6) made in one piece with the panels which prevent the drifting apart of two coupled floor panels into a direction (R) perpendicular to the related edges (2-3, 26-27) and parallel to the underside (7) of the coupled floor panels, characterized in that said edges, including the coupling means as well as the locking means, consist of a milled profile, and more particularly in that the tongue (9-31) and the groove (10-32) have a profile which can be produced by means of milling cutters having a diameter which is at least 5 times, and even better 20 times larger than the thickness (F) of the floor panels (1).

25.- Floor covering according to claim 24, characterized in that the edges of the panels have a profile which can be milled in two milling actions.

26.- Floor covering, consisting of hard floor panels (1) which, at least at the edges of two opposite sides (2-3,

26-27), are provided with coupling parts (4-5, 28-29), co-operating with each other, substantially in the form of a tongue (9-31) and a groove (10-32), whereby the coupling parts (4-5, 28-29) are provided with integrated mechanical locking means (6) which prevent the drifting apart of two coupled floor panels into a direction (R) perpendicular to the related edges (2-3, 26-27) and parallel to the underside (7) of the coupled floor panels, characterized in that said floor panels (1) show the further features:

- that the floor panels are rectangular laminated floor panels;
- that such coupling parts are provided at all four sides;
- that the coupling parts at the edges of a first pair of opposite sides are realized in such a manner that the floor panels (1), from a position in which the edges are positioned along each other, can be engaged at least by means of a turning movement, whereas the coupling parts at the edges of the second pair of opposite sides are realized in such a manner that the floor panels, from a position in which the edges are positioned along each other, also can be engaged by means of a turning movement;
- that the coupling parts (4-5, 28-29) and the locking means (6) are realized in one piece with the core (8) of the floor panels; and
- that the lower side of each panel shows a supporting surface which is substantially co-planar with the upper side of the panel.

27.- Floor covering, consisting of hard floor panels (1) which, at least at the edges of two opposite sides (2-3, 26-27), are provided with coupling parts (4-5, 28-29), co-operating with each other, substantially in the form of



a tongue (9-31) and a groove (10-32), whereby the coupling parts (4-5, 28-29) are provided with integrated mechanical locking means (6) which prevent the drifting apart of two coupled floor panels into a direction (R) perpendicular to the related edges (2-3, 26-27) and parallel to the underside (7) of the coupled floor panels, characterized in that said floor panels (1) show the further features:

- that the floor panels are rectangular;
- that such coupling parts are provided at all four sides;
- that the coupling parts at the edges of a first pair of opposite sides are realized in such a manner that the floor panels (1), from a position in which the edges are positioned along each other, can be engaged at least by means of a turning movement, whereas the coupling parts at the edges of the second pair of opposite sides are realized in such a manner that the floor panels, from a position in which the edges are positioned along each other, can be engaged only by means of a turning movement;
- that the coupling parts (4-5, 28-29) and the locking means (6) are realized in one piece with the core (8) of the floor panels; and
- that the lower side of each panel forms a supporting surface which is substantially co-planar with the upperside of the panel.

28.- Floor covering, consisting of hard floor panels (1) which, at least at the edges of two opposite sides (2-3, 26-27), are provided with coupling parts (4-5, 28-29), co-operating with each other, substantially in the form of a tongue (9-31) and a groove (10-32), whereby the coupling parts (4-5, 28-29) are provided with integrated mechanical locking means (6) which prevent the drifting apart of two

coupled floor panels into a direction (R) perpendicular to the related edges (2-3, 26-27) and parallel to the underside (7) of the coupled floor panels, characterized in that said floor panels (1) show the further features:

- that the floor panels are rectangular;
- that such coupling parts are provided at all four sides;
- that the coupling parts at the edges of a first pair of opposite sides are realized in such a manner that the floor panels (1), from a position in which the edges are positioned along each other, can be engaged only by means of a turning movement, whereas the coupling parts at the edges of the second pair of opposite sides are also realized in such a manner that the floor panels, from a position in which the edges are positioned along each other, can be engaged only by means of a turning movement;
- that the coupling parts (4-5, 28-29) and the locking means (6) are realized in one piece with the core (8) of the floor panels; and
- that the lower side of each panel forms a supporting surface which is substantially co-planar with the upperside of the panel.

29.- Floor covering, consisting of hard floor panels (1) which, at least at the edges of two opposite sides (2-3, 26-27), are provided with coupling parts (4-5, 28-29), co-operating with each other, substantially in the form of a tongue (9-31) and a groove (10-32), whereby the coupling parts (4-5, 28-29) are provided with integrated mechanical locking means (6) which prevent the drifting apart of two coupled floor panels into a direction (R) perpendicular to the related edges (2-3, 26-27) and parallel to the

underside (7) of the coupled floor panels, characterized in that said floor panels (1) show the further features:

- that the floor panels are rectangular;
- that such coupling parts are provided at all four sides;
- that the coupling parts at the edges of a first pair of opposite sides are realized in such a manner that the floor panels (1), from a position in which the edges are positioned along each other, can be engaged at least by means of a turning movement, whereas the coupling parts at the edges of the second pair of opposite sides are realized in such a manner that the floor panels, from a position in which the edges are positioned along each other, can be engaged at least by shifting them towards each other; and
- that the coupling parts (4-5, 28-29) and the locking means (6) are realized in one piece with the core (8) of the floor panels.

30.- Floor covering, consisting of hard floor panels (1) which, at least at the edges of two opposite sides (2-3, 26-27), are provided with coupling parts (4-5, 28-29), co-operating with each other, substantially in the form of a tongue (9-31) and a groove (10-32), whereby the coupling parts (4-5, 28-29) are provided with integrated mechanical locking means (6) which prevent the drifting apart of two coupled floor panels into a direction (R) perpendicular to the related edges (2-3, 26-27) and parallel to the underside (7) of the coupled floor panels, characterized in that said floor panels (1) show the further features:

- that the floor panels are rectangular;
- that such coupling parts are provided at all four sides; and

- that the coupling parts at the edges of a first pair of opposite sides are realized in such a manner that the floor panels (1), from a position in which the edges are positioned along each other, can be engaged only by means of a turning movement, whereas the coupling parts at the edges of the second pair of opposite sides are realized in such a manner that the floor panels, from a position in which the edges are positioned along each other, can be engaged at least by shifting them towards each other.

31.- Floor covering according to claim 30, characterized in that the coupling parts at one edge comprise a tongue having a locking element (11) formed by a protrusion with a bent round shape at the lower side (12) of the tongue (9) and at the opposite edge a groove provided with a second locking element (13), formed by a recess with a bent hollow shape in the lower wall (14) of the groove (10); and in that at the edges perpendicular to the first mentioned edges, the panels (1) are provided with coupling parts (4-5, 28-29), having locking means (6) allowing to couple the panels (1) by means of shifting.

32.- Floor covering according to claim 31, characterized in that the protrusion and the recess are circle-shaped.

33.- Floor covering, consisting of hard floor panels (1) which, at least at the edges of two opposite sides (2-3, 26-27), are provided with coupling parts (4-5, 28-29), co-operating with each other, substantially in the form of a tongue (9-31) and a groove (10-32), whereby the coupling parts (4-5, 28-29) are provided with integrated mechanical locking means (6) which prevent the drifting apart of two coupled floor panels into a direction (R) perpendicular to

the related edges (2-3, 26-27) and parallel to the underside (7) of the coupled floor panels, characterized in that said floor panels (1) show the further features:

- that the floor panels are rectangular;
- that such coupling parts are provided at all four sides;
- that the coupling parts at the edges of a first pair of opposite sides are realized in such a manner that the floor panels (1), from a position in which the edges are positioned along each other, can be engaged at least by shifting them towards each other, whereas the coupling parts at the edges of the second pair of opposite sides are realized in such a manner that the floor panels, from a position in which the edges are positioned along each other, can be engaged also at least by shifting them towards each other; and
- that the coupling parts (4-5, 28-29) and the locking means (6) are realized in one piece with the core (8) of the floor panels.

34.- Floor covering, consisting of hard floor panels (1) which, at least at the edges of two opposite sides (2-3, 26-27), are provided with coupling parts (4-5, 28-29), co-operating with each other, substantially in the form of a tongue (9-31) and a groove (10-32), whereby the coupling parts (4-5, 28-29) are provided with integrated mechanical locking means (6) which prevent the drifting apart of two coupled floor panels into a direction (R) perpendicular to the related edges (2-3, 26-27) and parallel to the underside (7) of the coupled floor panels, characterized in that said floor panels (1) show the further features:

- that the floor panels are rectangular;
- that such coupling parts are provided at all four sides; and

- that the coupling parts at the edges of a first pair of opposite sides are realized in such a manner that the floor panels (1), from a position in which the edges are positioned along each other, can be engaged at least by means of a turning movement, whereas the coupling parts at the edges of the second pair of opposite sides are realized in such a manner that the floor panels, from a position in which the edges are positioned along each other, can be engaged only by shifting them towards each other.

35.- Floor covering, consisting of hard floor panels (1) which, at least at the edges of two opposite sides (2-3, 26-27), are provided with coupling parts (4-5, 28-29), co-operating with each other, substantially in the form of a tongue (9-31) and a groove (10-32), whereby the coupling parts (4-5, 28-29) are provided with integrated mechanical locking means (6) which prevent the drifting apart of two coupled floor panels into a direction (R) perpendicular to the related edges (2-3, 26-27) and parallel to the underside (7) of the coupled floor panels, characterized in that said floor panels (1) show the further features:

- that the floor panels are rectangular;
- that such coupling parts are provided at all four sides; and
- that the coupling parts at the edges of a first pair of opposite sides are realized in such a manner that the floor panels (1), from a position in which the edges are positioned along each other, can be engaged only by means of a turning movement, whereas the coupling parts at the edges of the second pair of opposite sides are realized in such a manner that the floor panels, from a position in which the edges are

positioned along each other, can be engaged only by shifting them towards each other.

36.- Floor covering, consisting of hard floor panels (1) which, at least at the edges of two opposite sides (2-3, 26-27), are provided with coupling parts (4-5, 28-29), co-operating with each other, substantially in the form of a tongue (9-31) and a groove (10-32), whereby the coupling parts (4-5, 28-29) are provided with integrated mechanical locking means (6) which prevent the drifting apart of two coupled floor panels into a direction (R) perpendicular to the related edges (2-3, 26-27) and parallel to the underside (7) of the coupled floor panels, characterized in that said floor panels (1) show the further features:

- that the floor panels are rectangular;
- that such coupling parts are provided at all four sides; and
- that the coupling parts at the edges of a first pair of opposite sides are realized in such a manner that the floor panels (1), from a position in which the edges are positioned along each other, can be engaged at least by shifting them towards each other, whereas the coupling parts at the edges of the second pair of opposite sides are realized in such a manner that the floor panels, from a position in which the edges are positioned along each other, can be engaged only by shifting them towards each other.

37.- Floor covering, consisting of hard floor panels (1) which, at least at the edges of two opposite sides (2-3, 26-27), are provided with coupling parts (4-5, 28-29), co-operating with each other, substantially in the form of a tongue (9-31) and a groove (10-32), whereby the coupling parts (4-5, 28-29) are provided with integrated mechanical

locking means (6) which prevent the drifting apart of two coupled floor panels into a direction (R) perpendicular to the related edges (2-3, 26-27) and parallel to the underside (7) of the coupled floor panels, characterized in that said floor panels (1) show the further features:

- that the floor panels are rectangular;
- that such coupling parts are provided at all four sides;
- that the coupling parts at the edges of a first pair of opposite sides are realized in such a manner that the floor panels (1), from a position in which the edges are positioned along each other, can be engaged only by shifting them towards each other, whereas the coupling parts at the edges of the second pair of opposite sides are realized in such a manner that the floor panels, from a position in which the edges are positioned along each other, can also be engaged only by shifting them towards each other; and
- that the coupling parts (4-5, 28-29) and the locking means (6) are realized in one piece with the core (8) of the floor panels.

38.- Floor covering, consisting of hard floor panels (1) which, at least at the edges of two opposite sides (2-3, 26-27), are provided with coupling parts (4-5, 28-29), co-operating with each other, substantially in the form of a tongue (9-31) and a groove (10-32), whereby the coupling parts (4-5, 28-29) are provided with integrated mechanical locking means (6) which prevent the drifting apart of two coupled floor panels into a direction (R) perpendicular to the related edges (2-3, 26-27) and parallel to the underside (7) of the coupled floor panels, characterized in that said floor panels (1) show the further features:



- that the floor panels are rectangular laminated floor panels;
- that such coupling parts are provided at all four sides;
- that the coupling parts at the edges of a first pair of opposite sides are realized in such a manner that the floor panels (1), from a position in which the edges are positioned along each other, can be engaged by means of a turning movement as well as by shifting them towards each other, whereas the coupling parts at the edges of the second pair of opposite sides are realized in such a manner that the floor panels, from a position in which the edges are positioned along each other, can be engaged at least by means of a turning movement; and
- that the coupling parts (4-5, 28-29) and the locking means (6) are realized in one piece with the core (8) of the floor panels.

39.- Floor covering, consisting of hard floor panels (1) which, at least at the edges of two opposite sides (2-3, 26-27), are provided with coupling parts (4-5, 28-29), co-operating with each other, substantially in the form of a tongue (9-31) and a groove (10-32), whereby the coupling parts (4-5, 28-29) are provided with integrated mechanical locking means (6) which prevent the drifting apart of two coupled floor panels into a direction (R) perpendicular to the related edges (2-3, 26-27) and parallel to the underside (7) of the coupled floor panels, characterized in that said floor panels (1) show the further features:

- that the floor panels are rectangular laminated floor panels;
- that such coupling parts are provided at all four sides; and

- that the coupling parts at the edges of a first pair of opposite sides are realized in such a manner that the floor panels (1), from a position in which the edges are positioned along each other, can be engaged by means of a turning movement as well as by shifting them towards each other, whereas the coupling parts at the edges of the second pair of opposite sides are realized in such a manner that the floor panels, from a position in which the edges are positioned along each other, can be engaged only by means of a turning movement.

40.- Floor covering, consisting of hard floor panels (1) which, at least at the edges of two opposite sides (2-3, 26-27), are provided with coupling parts (4-5, 28-29), co-operating with each other, substantially in the form of a tongue (9-31) and a groove (10-32), whereby the coupling parts (4-5, 28-29) are provided with integrated mechanical locking means (6) which prevent the drifting apart of two coupled floor panels into a direction (R) perpendicular to the related edges (2-3, 26-27) and parallel to the underside (7) of the coupled floor panels, characterized in that said floor panels (1) show the further features:

- that the floor panels are rectangular laminated floor panels;
- that such coupling parts are provided at all four sides;
- that the coupling parts at the edges of a first pair of opposite sides are realized in such a manner that the floor panels (1), from a position in which the edges are positioned along each other, can be engaged by means of a turning movement as well as by shifting them towards each other, whereas the coupling parts at the edges of the second pair of opposite sides are

realized in such a manner that the floor panels, from a position in which the edges are positioned along each other, can be engaged at least by shifting them towards each other; and

- that the coupling parts (4-5, 28-29) and the locking means (6) are realized in one piece with the core (8) of the floor panels.

41.- Floor covering, consisting of hard floor panels (1) which, at least at the edges of two opposite sides (2-3, 26-27), are provided with coupling parts (4-5, 28-29), co-operating with each other, substantially in the form of a tongue (9-31) and a groove (10-32), whereby the coupling parts (4-5, 28-29) are provided with integrated mechanical locking means (6) which prevent the drifting apart of two coupled floor panels into a direction (R) perpendicular to the related edges (2-3, 26-27) and parallel to the underside (7) of the coupled floor panels, characterized in that said floor panels (1) show the further features:

- that the floor panels are rectangular laminated floor panels;
- that such coupling parts are provided at all four sides; and
- that the coupling parts at the edges of a first pair of opposite sides are realized in such a manner that the floor panels (1), from a position in which the edges are positioned along each other, can be engaged by means of a turning movement as well as by shifting them towards each other, whereas the coupling parts at the edges of the second pair of opposite sides are realized in such a manner that the floor panels, from a position in which the edges are positioned along each other, can be engaged only by shifting them towards each other.

42.- Floor covering, consisting of hard floor panels (1) which, at least at the edges of two opposite sides (2-3, 26-27), are provided with coupling parts (4-5, 28-29), co-operating with each other, substantially in the form of a tongue (9-31) and a groove (10-32), whereby the coupling parts (4-5, 28-29) are provided with integrated mechanical locking means (6) which prevent the drifting apart of two coupled floor panels into a direction (R) perpendicular to the related edges (2-3, 26-27) and parallel to the underside (7) of the coupled floor panels, characterized in that said floor panels (1) show the further features:

- that the floor panels are rectangular laminated floor panels;
- that such coupling parts are provided at all four sides;
- that the coupling parts at the edges of a first pair of opposite sides are realized in such a manner that the floor panels (1), from a position in which the edges are positioned along each other, can be engaged by means of a turning movement as well as by shifting them towards each other, whereas the coupling parts at the edges of the second pair of opposite sides are realized in such a manner that the floor panels, from a position in which the edges are positioned along each other, can also be engaged by means of a turning movement as well as by shifting them towards each other; and
- that the coupling parts (4-5, 28-29) and the locking means (6) are realized in one piece with the core (8) of the floor panels.

43.- Floor covering, consisting of hard floor panels (1) which, at least at the edges of two opposite sides (2-3, 26-27), are provided with coupling parts (4-5, 28-29),

co-operating with each other, substantially in the form of a tongue (9-31) and a groove (10-32), whereby the coupling parts (4-5, 28-29) are provided with integrated mechanical locking means (6) which prevent the drifting apart of two coupled floor panels into a direction (R) perpendicular to the related edges (2-3, 26-27) and parallel to the underside (7) of the coupled floor panels, characterized in that said floor panels (1) show the further features:

- that the floor panels consist of laminated floor panels having a core of MDF or HDF;
- that the coupling parts are realized in such a manner that the floor panels (1), from a position in which the edges are positioned along each other, can be engaged at least by means of a turning movement;
- that the coupling parts (4-5, 28-29) and the locking means (6) are realized in one piece with the core (8) of the floor panels; and
- that said groove is bordered by a lower lip, which lip is made solely out of the material of the floor panel itself, more particularly is free of additional elements.

44.- Floor covering, consisting of hard floor panels (1) which, at least at the edges of two opposite sides (2-3, 26-27), are provided with coupling parts (4-5, 28-29), co-operating with each other, substantially in the form of a tongue (9-31) and a groove (10-32), whereby the coupling parts (4-5, 28-29) are provided with integrated mechanical locking means (6) which prevent the drifting apart of two coupled floor panels into a direction (R) perpendicular to the related edges (2-3, 26-27) and parallel to the underside (7) of the coupled floor panels, characterized in that said floor panels (1) show the further features:

- that the coupling parts are realized in such a manner that the floor panels (1), from a position in which the edges are positioned along each other, can be engaged only by means of a turning movement;
- that the coupling parts (4-5, 28-29) and the locking means (6) are realized in one piece with the core (8) of the floor panels; and
- that the lower side of each panel forms a supporting surface which is substantially co-planar with the upper surface.

45.- Floor covering, consisting of hard floor panels (1) which, at least at the edges of two opposite sides (2-3, 26-27), are provided with coupling parts (4-5, 28-29), co-operating with each other, substantially in the form of a tongue (9-31) and a groove (10-32), whereby the coupling parts (4-5, 28-29) are provided with integrated mechanical locking means (6) which prevent the drifting apart of two coupled floor panels into a direction (R) perpendicular to the related edges (2-3, 26-27) and parallel to the underside (7) of the coupled floor panels, characterized in that said floor panels (1) show the further features:

- that the floor panels consist of laminated floor panels having a core of MDF or HDF;
- that the coupling parts are realized in such a manner that the floor panels (1), from a position in which the edges are positioned along each other, can be engaged at least by shifting the panels towards each other;
- that the coupling parts (4-5, 28-29) and the locking means (6) are realized in one piece with the core (8) of the floor panels;

- that said groove is bordered by a lower lip, which lip extends beyond the upper lip bordering the groove; and
- that the locking means are located at least partially into the portion of the lower lip which extends beyond the upper lip.

46.- Floor covering, consisting of hard floor panels (1) which, at least at the edges of two opposite sides (2-3, 26-27), are provided with coupling parts (4-5, 28-29), co-operating with each other, substantially in the form of a tongue (9-31) and a groove (10-32), whereby the coupling parts (4-5, 28-29) are provided with integrated mechanical locking means (6) which prevent the drifting apart of two coupled floor panels into a direction (R) perpendicular to the related edges (2-3, 26-27) and parallel to the underside (7) of the coupled floor panels, characterized in that said floor panels (1) show the further features:

- that the floor panels consist of laminated floor panels having a core of MDF or HDF;
- that the coupling parts are realized in such a manner that the floor panels (1), from a position in which the edges are positioned along each other, can be engaged only by shifting the panels towards each other;
- that the coupling parts (4-5, 28-29) and the locking means (6) are realized in one piece with the core (8) of the floor panels;
- that said groove is bordered by a lower lip, which lip extends beyond the upper lip bordering the groove; and
- that the locking means are located at least partially into the portion of the lower lip which extends beyond the upper lip.

47.- Floor covering, consisting of hard floor panels (1) which, at least at the edges of two opposite sides (2-3, 26-27), are provided with coupling parts (4-5, 28-29), co-operating with each other, substantially in the form of a tongue (9-31) and a groove (10-32), whereby the coupling parts (4-5, 28-29) are provided with integrated mechanical locking means (6) which prevent the drifting apart of two coupled floor panels into a direction (R) perpendicular to the related edges (2-3, 26-27) and parallel to the underside (7) of the coupled floor panels, characterized in that said floor panels (1) show the further features:

- that the floor panels consist of laminated floor panels having a core of MDF or HDF;
- that the coupling parts are realized in such a manner that the floor panels (1), from a position in which the edges are positioned along each other, can be engaged by means of turning the panels as well as by shifting the panels towards each other;
- that the coupling parts (4-5, 28-29) and the locking means (6) are realized in one piece with the core (8) of the floor panels; and
- that said groove is bordered by a lower lip, which lip extends beyond the upper lip bordering the groove.

48.- Floor covering, consisting of hard floor panels (1) which, at least at the edges of two opposite sides (2-3, 26-27), are provided with coupling parts (4-5, 28-29), co-operating with each other, substantially in the form of a tongue (9-31) and a groove (10-32), whereby the coupling parts (4-5, 28-29) are provided with integrated mechanical locking means (6) which prevent the drifting apart of two coupled floor panels into a direction (R) perpendicular to the related edges (2-3, 26-27) and parallel to the



underside (7) of the coupled floor panels, characterized in that said floor panels (1) show the further features:

- that the floor panels are rectangular laminated floor panels;
- that such coupling parts are provided at all four sides;
- that the coupling parts (4-5, 28-29) and the locking means (6) are realized in one piece with the core (8) of the floor panels.

49.- Floor covering, consisting of hard floor panels (1) which, at least at the edges of two opposite sides (2-3, 26-27), are provided with coupling parts (4-5, 28-29), co-operating with each other, substantially in the form of a tongue (9-31) and a groove (10-32), whereby the coupling parts (4-5, 28-29) are provided with integrated mechanical locking means (6) which prevent the drifting apart of two coupled floor panels into a direction (R) perpendicular to the related edges (2-3, 26-27) and parallel to the underside (7) of the coupled floor panels, characterized in that said floor panels (1) show the further features:

- that the floor panels are rectangular;
- that such coupling parts are provided at all four sides;
- that the coupling parts (4-5, 28-29) and the locking means (6) are realized in one piece with the core (8) of the floor panels;
- that the lower lip bordering the lower side of the groove extends beyond the upper lip bordering the upper side of the groove;
- that the locking means are located in the lower lip and the corresponding portion of the underside of the tongue;

- that the couplings at all four sides are free of play; and
- that at least at one pair of opposite sides the locking means (6) are providing in a snap-together effect.

50.- Floor covering according to any of claims 26 to 49, characterized in that the panels are rectangular and that one side is longer than the other, and in that the first pair of opposite edges is formed by the edges of the longer sides, whereas the second pair of opposite edges is formed by the edges of the shorter side.

51.- Floor covering according to any of claims 26 to 49, characterized in that the panels are rectangular and that one side is longer than the other, and in that the first pair of opposite edges is formed by the edges of the shorter sides, whereas the second pair of opposite edges is formed by the edges of the longer side.

52.- Floor covering according to any of the preceding claims, characterized in that the coupling parts (4-5, 28-29) provide in an interlocking, allowing to couple the panels free from play in respect to each other, according to all directions in the plane which is situated perpendicular to the aforementioned edges.

53.- Floor covering according to any of the preceding claims, characterized in that the lower lip (23-43) shows one or more of the following features:

- a thickness which is smaller than the thickness of the upper lip;
- a flexibility higher than the flexibility of the

upper lip (22-42).

54.- Floor covering according to any of the preceding claims, characterized in that the locking means substantially consist of a locking element in the form of a protrusion, provided at the lower side of the tongue and a locking element formed in the lip which borders the lower side of the groove, in the form of a recess.

55.- Floor covering according to claim 54, characterized in that the locking means are configured in such a manner that one or more of following features are obtained:

- that said protrusion has a base extending along the lower surface (35) of said tongue over a considerable length;
- that the lower lip extends beyond the upper lip and that the recess, and more particularly the contact surface providing in the locking effect, is located at least partially beyond the outer end of the upper lip;
- that the locking means (6) are formed by locking elements (34) which are located completely in the portion of the lower lip (23-43) which extends beyond the upper lip (22-42), such that the lowermost point (87) of engagement of the locking elements (34) is located underneath the top layer of the floor panel (1) which carries the related tongue (9);
- that the portion of the lower lip (23-43) located beyond the upper lip (22-42) is located completely below the level defined by the lower side of the upper lip (22-42);
- that said portion of the lower lip is located

completely below the central line M2 of the panel;

- that the distance (E) by which the lower lip extends beyond the upper lip is smaller than one time the total thickness (F) of the floor panel (1).

56.- Floor covering according to any of the preceding claims, characterized in that the lip bordering the underside of the groove shows one or more of the following features:

- that this lip is elastically bendable;
- that the thickness of the lower lip (23-43) increases from the deepest point of the recess towards the innermost point of the groove (10).

57.- Floor covering according to any of the preceding claims, characterized in that the lower lip bordering the lower side of the groove shows one or more of the following features:

- that the lower lip is provided with a contact surface and in that at least this contact surface (39-73) is inwardly inclined;
- that said contact surface at the lower lip cooperates with the contact surface at the lower side of the tongue and in that both contact surfaces (38-39, 73-74) are inclined;
- that both contact surfaces (12-14, 38-39, 74-73) are inclined and have corresponding inclinations.

58.- Floor covering according to any of the preceding claims, characterized in that the lower lip has an inclined locking portion (39-73) which extends in such a manner that

the distance (X1-X2) up to the upper edge (16) of the floor panel (1) diminishes from below in upward direction.

59.- Floor covering according to any of the preceding claims, characterized in that the locking means (6) are provided with locking elements (33-34, 46-47) which are realized in such a manner that the tangent line (L) which is defined by the contact surfaces of said locking elements forms an angle (A) with the underside (7) of the floor panels which is different from 90 degrees, and preferably an angle (A) with the underside (7) of the floor panels which is 30° to 70°.

60.- Floor covering according to any of the preceding claims, characterized in that the total thickness (F) of each floor panel (1) is larger than or equal to 5 mm.

61.- Floor covering according to any of the preceding claims, characterized in that the locking means comprise a recess in the lower lip bordering the lower side of the groove and a protrusion at the lower side of the tongue and in that the lower surface of the aforementioned protrusion is bordered by at least two portions (38-40, 75-76), respectively a portion (38-75) with a strong inclination providing for the locking effect, and a portion (40-76) with a weaker inclination which renders the engagement of the coupling parts (4-5) easier.

62.- Floor covering according to any of the preceding claims, characterized in that the lower side of the tongue is provided with a curvature (77).

63.- Floor covering according to any of the preceding claims, characterized in that there is a curvature (78) at

the upper side of the lower lip (23-43), in other words the lip bordering the lower side of the groove, which curvature (78) forms a guidance when turning two floor panels (1) into each other.

64.- Floor covering according to any of the preceding claims, characterized in that dust chambers or similar (21-44-81) are provided between all sides of the engaged floor panels (1) which are directed laterally towards each other, and further characterized in that preferably in the engagement direction, apart from said contact surfaces (39-73) there exists only one substantial contact point between two coupled floor panels (1), which is formed by a section (84) at the location of the top side of the floor panels (1).

65.- Floor covering according to any of the preceding claims, characterized in that said floor panels (1) are provided with contact surfaces (85-86), more particularly abutment surfaces, formed by the upper side of the tongue (9-31) and the upper side of the groove (10) which, over the largest portion of their length, run parallel to the plane which is defined by the floor panels (1).

66.- Floor covering according to any of the preceding claims, characterized in that the underside of the upper lip (22-42), bordering the upper side of the groove, is provided with a chamfer (24-45).

67.- Floor covering according to any of the preceding claims, characterized in that the locking means comprise contact surfaces (39-73) which are located on radii (R1-R2) around the upper edges (15-16) of the floor panels, the

difference between these radii (R1-R2) being zero or not larger than 2 mm.

68.- Floor covering according to any of the preceding claims, characterized in that the locking means, and more particularly the upper side of the lower lip (43) and/or the lower side (12) of the tongue, show a portion having a curvature substantially with a radius (R1, respectively R2), said curvature having a center which is located within the circle (C1, respectively C2) which extends with a radius (R5) of 3 mm around the upper edge (15-16) of the panel (1) concerned.

69.- Floor covering according to any of the preceding claims, characterized in that the upper side of the upper lip (22-42) is in the same plane as the upper surface of the panel (1).

70.- Floor covering according to any of the preceding claims, characterized in that the tongue (9) and groove (10) allow to couple the panels (1) by a turning movement around the upper edges (15-16) of the panels (1), whereby during this movement the tongue can freely be slid into the groove (10).

71.- Floor covering according to any of the preceding claims, characterized in that the panels (1) have short sides and longer sides and in that the locking means (6) comprise contact surfaces which at the short sides have a stronger inclination than at the longer sides.

72.- Floor covering according to any of the preceding claims, characterized in that the floor panels (1) are realized as laminated flooring, whereby on the core (8) one

or more layers, among which a decorative layer (55) forming said decorative surface, are provided and whereby a backing layer (58) is provided at the underside (7).

73.- Floor covering according to any of the preceding claims, characterized in that the floor panels have a wood based core, comprising a ground wood product which, together with a binding agent is composed to a single compound and/or is made of chip board with fine chips, and preferably the wood based core of the floor panels (1) consists of HDF board or MDF board, whereby the coupling parts (4-5-28-29) and the locking means (6) are formed out of this board.

74.- Floor covering according to claim 73, characterized in that the coupling parts at their surface, in other words, the edges of the floor panels (1), are treated with a surface densifying agent, more particularly, a surface hardening agent.

75.- Floor covering according to any of the preceding claims, characterized in that the floor panels (1) are connected free of glue, such that they can be disassembled and be re-used.

76.- Floor covering according to any of the preceding claims, characterized in that the coupling parts and locking means are formed by profiled edges extending continuously along the complete length of the concerned sides of the panels.

77.- Floor covering according to any of the preceding claims, characterized in that the coupling parts and locking means are constructed such that they allow the



joining together of two panels at least by means of a turning movement or at least by shifting them towards each other.

78.- Floor covering according to any of the preceding claims, characterized in that the coupling means, including the locking means are made in one piece substantially out of the core.

79.- Floor covering according to any of the preceding claims, characterized in that said coupling means, including the locking means are formed out of milled profiles.

80.- Floor covering according to any of the preceding claims, characterized in that the floor panels are rectangular and show a shorter and a longer side and in that the coupling means, including the locking means are at least provided at the longer sides of the panels.

81.- Floor covering according to any of the preceding claims, characterized in that the floor panels are rectangular and show a shorter and a longer side and in that coupling means, including the locking means are at least provided at the shorter sides of the panels.

82.- Floor covering according to any of the preceding claims, characterized in that the locking means comprise a recess in the lip bordering the lower side of the groove and a protrusion at the lower side of the panel and in that the tongue (9-31) and groove (10-32) have a shape such that in coupled condition of two floor panels (1) there exists a chamber (81) between those sides of the protrusion and the

recess (36) that are located opposite to the sides at which the contact surfaces (39-73) are formed.

83.- Floor covering according to any of the preceding claims, characterized in that the locking means comprise a recess in the lip bordering the lower side of the groove and a protrusion at the lower side of the panel and in that there is a space (S, 81) between said protrusion and a portion of said lower lip (43), more particularly below said protrusion, allowing a further penetration of the protrusion in the recess, when necessary.

84.- Floor covering according to any of the preceding claims, characterized in that the panels comprise locking means (6) providing a snapping-together effect.

85.- Floor covering according to any of the preceding claims, characterized in that the floor panels are rectangular and that, on all four sides, more particularly two by two, they are provided with coupling parts providing a locking as well as in vertical as in horizontal direction.

86.- Floor covering according to any of the preceding claims characterized in that the coupling parts and locking means at one pair of the edges show the same characteristics as at the other pair of edges.

87.- Floor covering according to any of the preceding claims, characterized in that the panels show a lower side forming a supporting surface, which surfaces substantially co-planar with the upper side, more particularly is free from local additional elements, such as strips or the like.

88.- Floor covering, consisting of hard floor panels, characterized in that it combines the features of two or more of the preceding claims.

89.- Method of assembling a floor covering, said floor covering consisting of hard floor panels (1) of rectangular shape which, at both pairs of opposite sides (2-3, 26-27), are provided with coupling parts (4-5, 28-29) co-operating with each other, substantially in the form of a tongue (9-31) and a groove (10-32), whereby the coupling parts (4-5, 28-29) are provided with integrated mechanical locking means (6) made in one piece with the core of the panels (1), which prevent the drifting apart of two coupled floor panels (1) into a direction (R) perpendicular to the related edges (2-3, 26-27) and parallel to the underside (7) of the coupled floor panels (1), characterized in that the core of the panels, including the locking means (6), substantially consist of MDF or HDF, whereby the locking means (6) further provide in an engagement free of play between the coupled panels (1) and in that said method comprises the steps of:

- coupling a first of said panels (1) to an already installed panel or row of panels;
- coupling a second of said panels (1) to said already installed panel or row of panels;
- and shifting said second panel in a substantial planar fashion towards the first panel in order to couple the second panel to the first panel, wherein during said shifting the sliding properties are determined by the contact between the MDF or HDF surfaces of the coupling parts.

90.- A method of assembling a floor covering, said floor covering consisting of hard floor panels (1) of rectangular shape which, at both pairs of opposite sides (2-3, 26-27), are provided with coupling parts (4-5, 28-29) co-operating with each other, substantially in the form of a tongue (9-31) and a groove (10-32), whereby the coupling parts (4-5, 28-29) are provided with integrated mechanical locking means (6) which prevent the drifting apart of two coupled floor panels (1) into a direction (R) perpendicular to the related edges (2-3, 26-27) and parallel to the underside (7) of the coupled floor panels (1), whereby the lower lip (23-43) which limits the lower side of the groove (10), extends beyond the upper lip (22-42) and whereby said locking means (6) comprise a portion which inwardly slopes downward, which portion, at least partially, is located in the portion of the lower lip (23-43) which extends beyond the upper lip (22-42), whereby this portion cooperates with a surface at the lower side of the tongue, which is also inclined, characterized in that said method comprises the steps of:

- laying a first of said hard floor panels;
- placing a second panel next to an edge of said first panel, such that the tongue of one panel edge lies next to the groove of the other panel edge;
- shifting the panels towards each other, such that the tongue is moved into the groove, thereby urging down the lower lip, whereby the locking is realized in that the inclined surface of the lower lip systematically take place behind the inclined surface of the tongue.

91.- Method according to claim 90, characterized in that the first panel (1) is previously coupled to an already installed panel or row of panels, the side of this panel or

row of panels being directed to the first panel (1) being the side having the groove, and that the second panel, before being coupled to the first panel (1), first is coupled to the already installed panel or row of panels by means of the steps of:

- directing the second panel with its edge which is provided with a tongue towards the already installed panel or row of panels;
- inserting the panel with the tongue at least partially into the groove of the already installed panel or row of panels;
- and angling down the second panel so that the inclined locking surfaces are brought behind each other;

whereby, after having brought the second panel into a substantially horizontal position, this panel is shifted towards the first panel, thereby remaining coupled to the previously installed panel or row of panels.

92.- Method according to claim 90, characterized in that the first panel (1) is previously coupled to an already installed panel or row of panels, the side of this panel or row of panels being directed to the first panel (1) being the side having the groove, and in that the second panel, before being coupled to the first panel (1), first is coupled to the already installed panel or row of panels by means of the steps of:

- placing the second panel next to the edge of said previously installed panel or row of panels, such that the tongue of an edge of the second panel lies next to the groove of an edge of the other panel or row of panels;
- shifting the second panel towards the previously installed panel or row of panels, such that the tongue

of the second panel is moved into said groove, thereby urging down the lower lip of the already installed panel or row of panels, whereby the locking is realized in that the inclined surface of this lower lip systematically takes place behind the inclined surface at said tongue;

whereby, after having coupled the second panel with the previously installed panel or row of panels, this second panel is shifted towards the first panel, thereby remaining coupled to the previously installed panel or row of panels.

93.- Method according to any of the claims 89 to 92, characterized in that floor panels are used providing in a coupling without play, as well as in a joining offering a snapping-together effect.

94.- Method according to any of the claims 89 to 93, characterized in that panels are applied whereby the shaping of the tongue (9) is such that the upper side of the tongue (9) already with the first contact becomes situated under the lower side of the upper lip (42) when the floor panels are shifted towards each other.

95.- A method of assembling a floor covering, characterized in that said floor covering consists of hard floor panels (1) of rectangular shape which, at least at two opposite sides (2-3, 26-27), are provided with coupling parts (4-5, 28-29) co-operating with each other, substantially in the form of a tongue (9-31) and a groove (10-32), whereby the coupling parts (4-5, 28-29) are provided with integrated mechanical locking means (6), made in one piece with the panels (1), which prevent the drifting apart of two coupled floor panels (1) into a direction (R) perpendicular to the related edges (2-3, 26-27) and parallel to the

underside (7) of the coupled floor panels (1), whereby the lower lip (23-43) which limits the lower side of the groove (10), extends beyond the upper lip (22-42) and whereby said locking means (6) comprise a portion which inwardly slopes downward, which portion, at least partially, is located in the portion of the lower lip (23-43) which extends beyond the upper lip (22-42), whereby this portion cooperates with a surface at the lower side of the tongue, which is also inclined, and in that said method comprises the steps of:

- laying a first of said hard floor panels (1); and
- coupling a second panel to said first panel, by fitting the tongue and groove into each other, thereby providing that the lower lip is bent out in coupled condition, such that said lip, by means of the inclined portions provides in a force by which the panels (1) are permanently urged towards each other.

96.- Method according to claim 95, characterized in that floor panels (1) are applied which are provided with said coupling parts and locking means at both pairs of opposite sides (2-3, 26-27) and in that the method comprises the steps of:

- laying a first of said floor panels (1);
- coupling a second panel to said first panel, by fitting the tongue and groove into each other, thereby providing in that the lower lip is bent out in coupled condition, such that said lip, by means of the inclined portions provides in a force by which the panels (1) are permanently urged towards each other; and
- coupling a third panel to the first as well as second panel, respectively at a first edge and a second edge perpendicular to the first edge, thereby providing in that the lower lip at both edges is bent

out in coupled condition, such that each of said lips, by means of the inclined portions provides in a force by which the panels (1) are permanently urged towards each other.

97.- A method according to claim 95 or 96, characterized in that the panels (1) are installed on a flexible underlay, whereby the elastically bent portions of the panels (1) which provide in that the panels (1) are pressed to each other, are bent out downwardly and whereby the unevenness caused by these portions is taken up by the flexibility of the underlay.

98.- Method according to any of the claims 89 to 97, characterized in that panels are used showing the features described in any of the claims 1 to 97.

99.- Method for manufacturing floor panels, which floor panels at least at the edges of two opposite sides are provided with coupling parts co-operating with each other, substantially in the form of a tongue and a groove, whereby the coupling parts are provided with integrated mechanical locking means made in one piece out of the material of the panels which prevent the drifting apart of two coupled floor panels into a direction perpendicular to the related edges and parallel to the underside of the coupled floor panels, characterized in that the tongue and/or groove is realized by means of a milling process with at least two subsequent milling cycles by means of milling cutters which are positioned in different angles in respect to the related floor panel (1).

100.- Method according to claim 99, characterized in that one milling cutter is rotated in a plane substantially



parallel to the plane of the panel, whereas the second milling cutter is rotated in a plane which is inclined in respect to the plane of the panel (1).

101.- Method according to claim 99 or 100, characterized in that during each aforementioned milling cycles each time substantially the final shape of one flank (71-72), either of the tongue or the groove, is realized.

102.- Method according to any of the claims 99 to 101, characterized in that for the aforementioned milling cycles milling cutters (63-64-65-66-67-68-69-70) are applied which extend outside the groove (10-32), respectively the tongue (9-31), and more particularly show diameters (G) which are at least five times larger than the thickness (F) of the floor panels (1).

103.- Method according to claim 102, characterized in that said diameters (G) are at least twenty times larger than the thickness (F) of the floor panels (1).

104. - Method according to any of the claims 99 to 103, characterized in that at all four sides of the floor panel (1) a profile is provided and that the floor panels are displaced according to two perpendicular movements (V1-V2), whereby during one of the movements profiles at two opposite edges are provided, whereas during the other movement profiles are provided at the small edges.

105.- Method for manufacturing floor panels, preferably according to any of the claims 99 to 104, which floor panels at least at the edges of two opposite sides are provided with coupling parts co-operating with each other, substantially in the form of a tongue and a groove, whereby



the coupling parts are provided with integrated mechanical locking means made in one piece out of the material of the panels which prevent the drifting apart of two coupled floor panels into a direction perpendicular to the related edges and parallel to the underside of the coupled floor panels, characterized in that the complete shape of the edges is formed solely by sawing and milling.

106.- Floor panel for realizing a floor covering according to any of the claims 1 to 88 and/or for assembling a floor covering according to a method described in any of the claims 89 to 98.

DATED this SEVENTH day of MARCH 2000  
Unilin Beheer B.V.

By its Patent Attorneys  
DAVIES COLLISON CAVE

*Fig. 1*

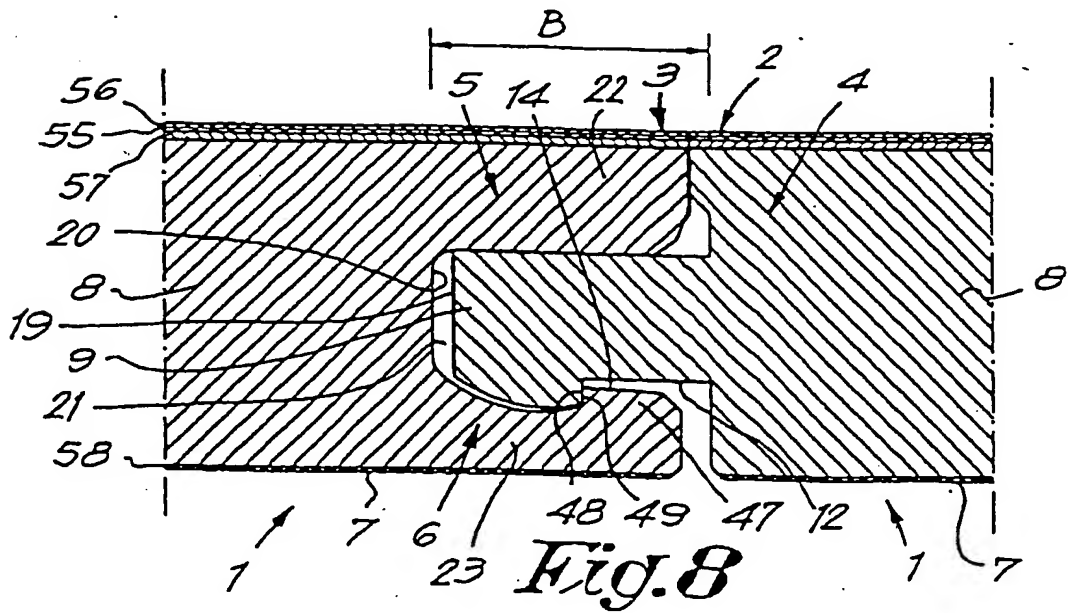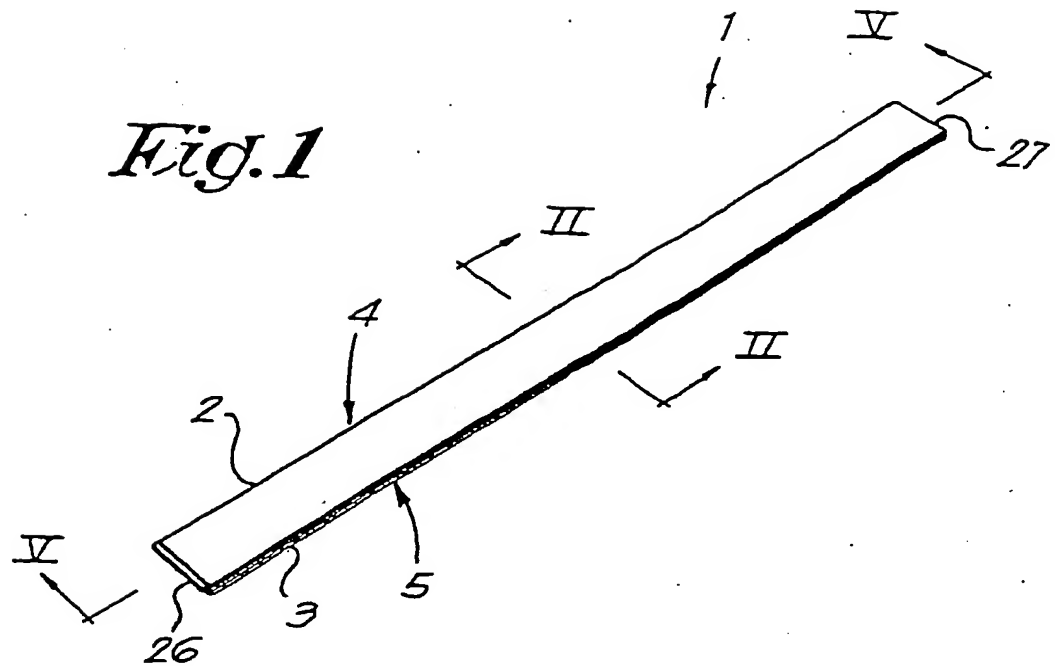

1 0 0 0 0 0 0 0

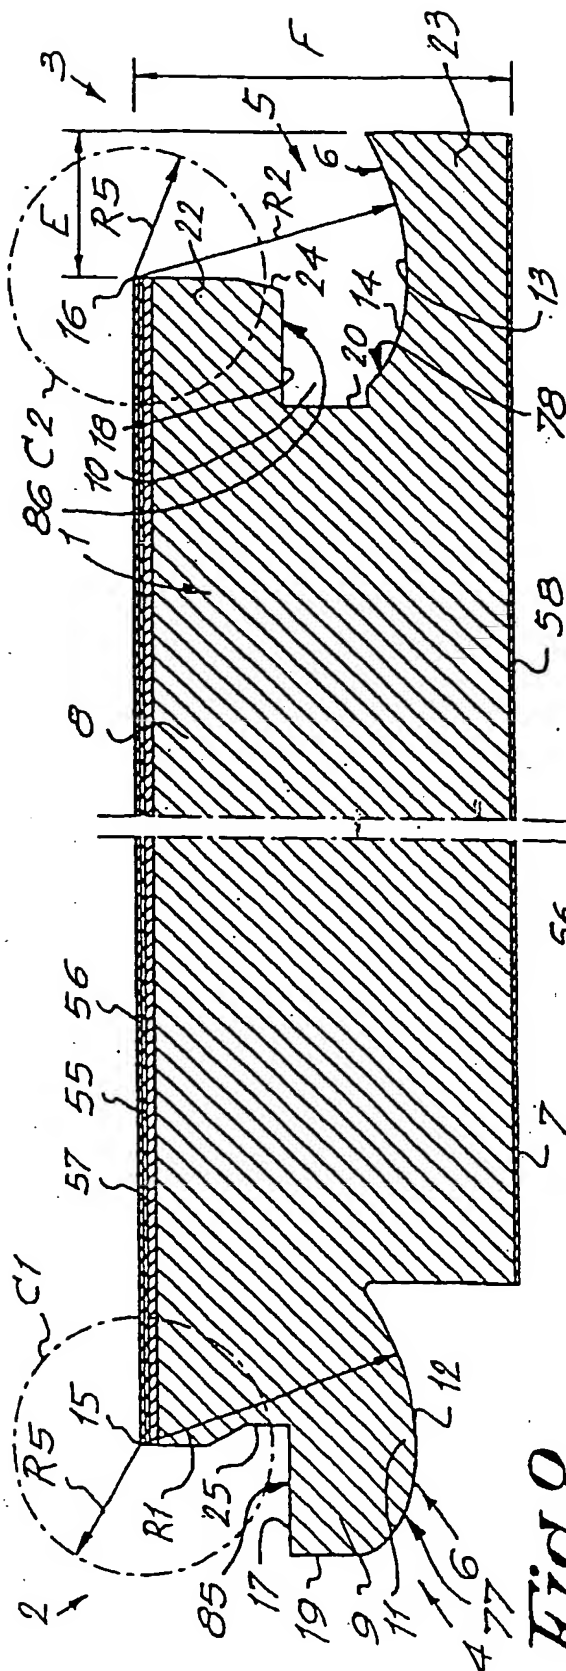


Fig. 2

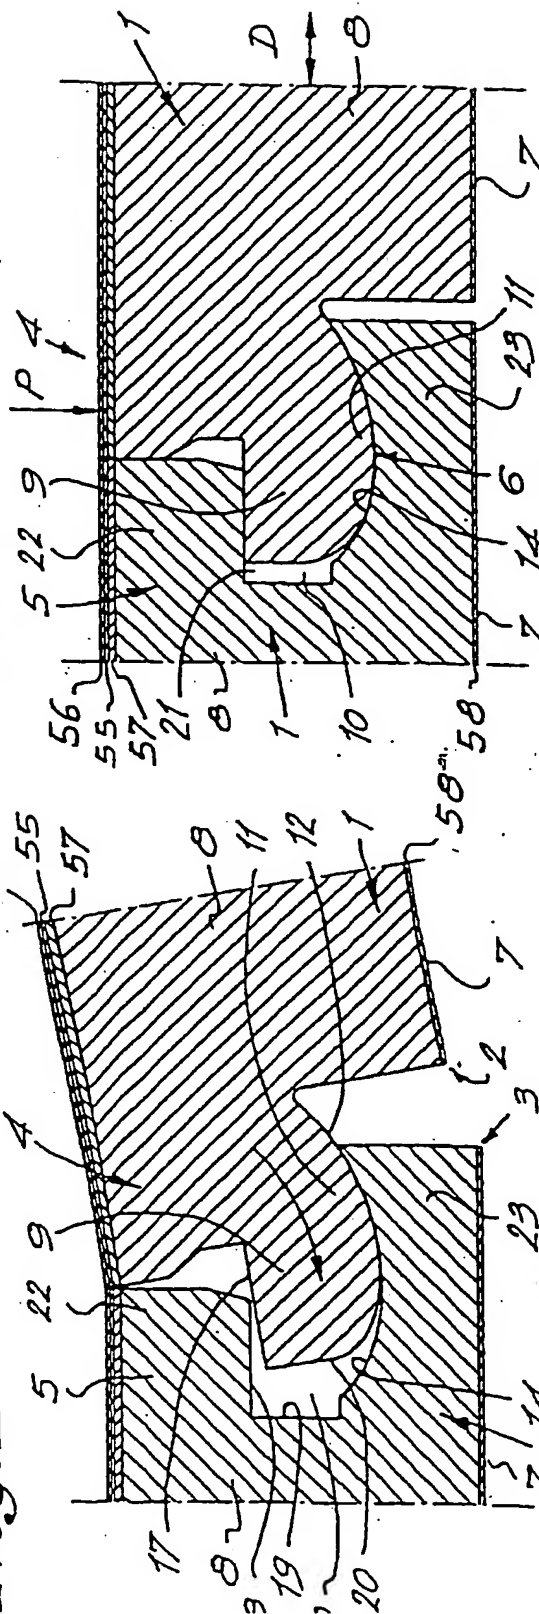


Fig. 3

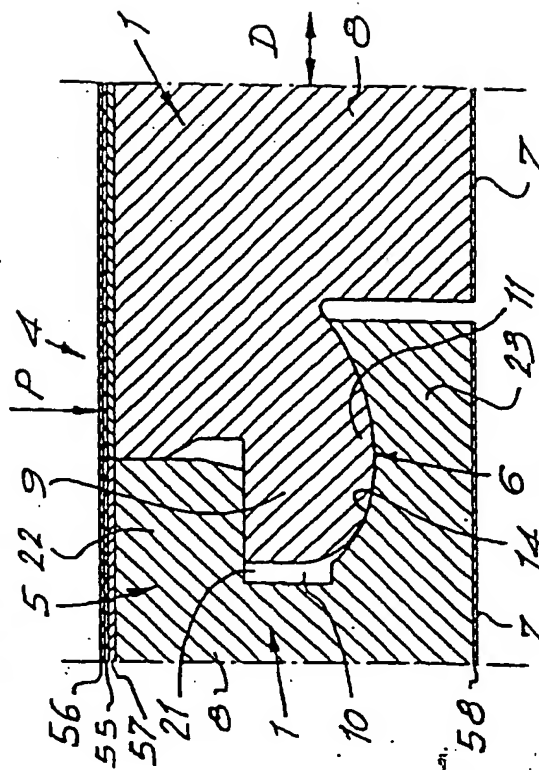
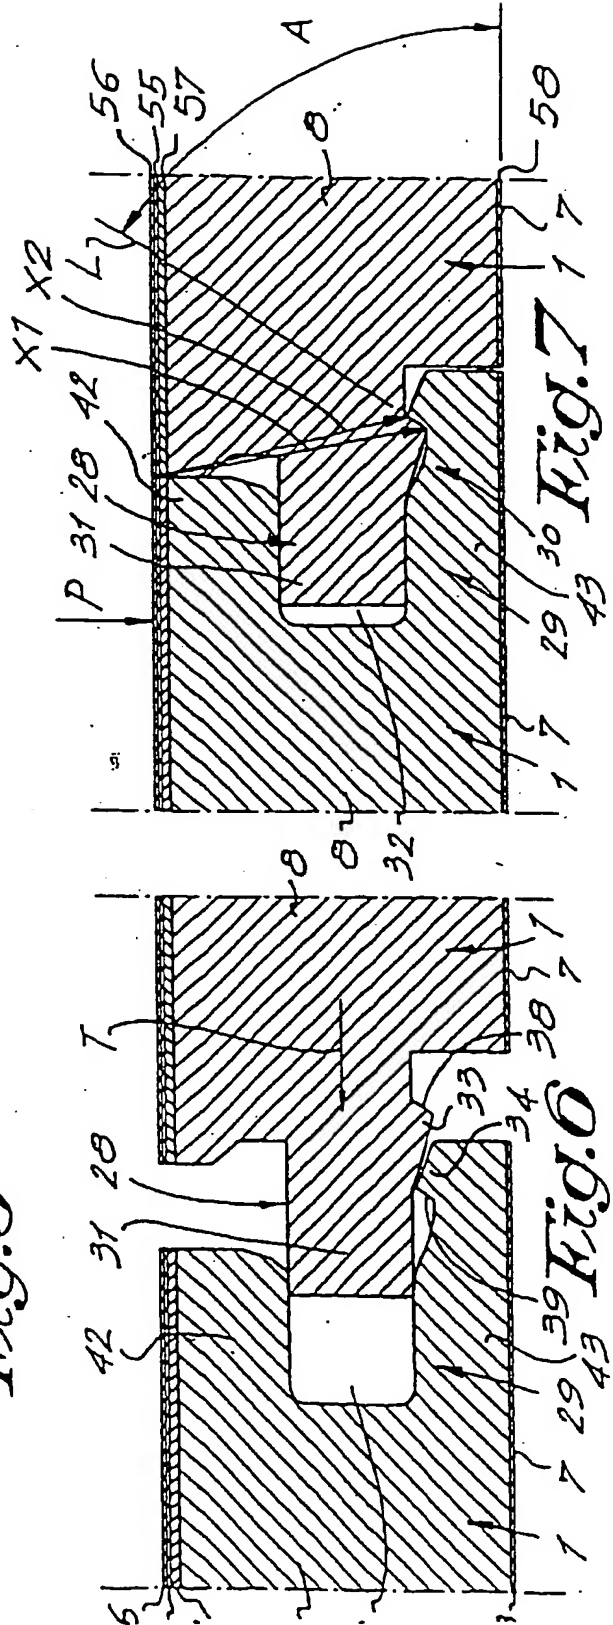
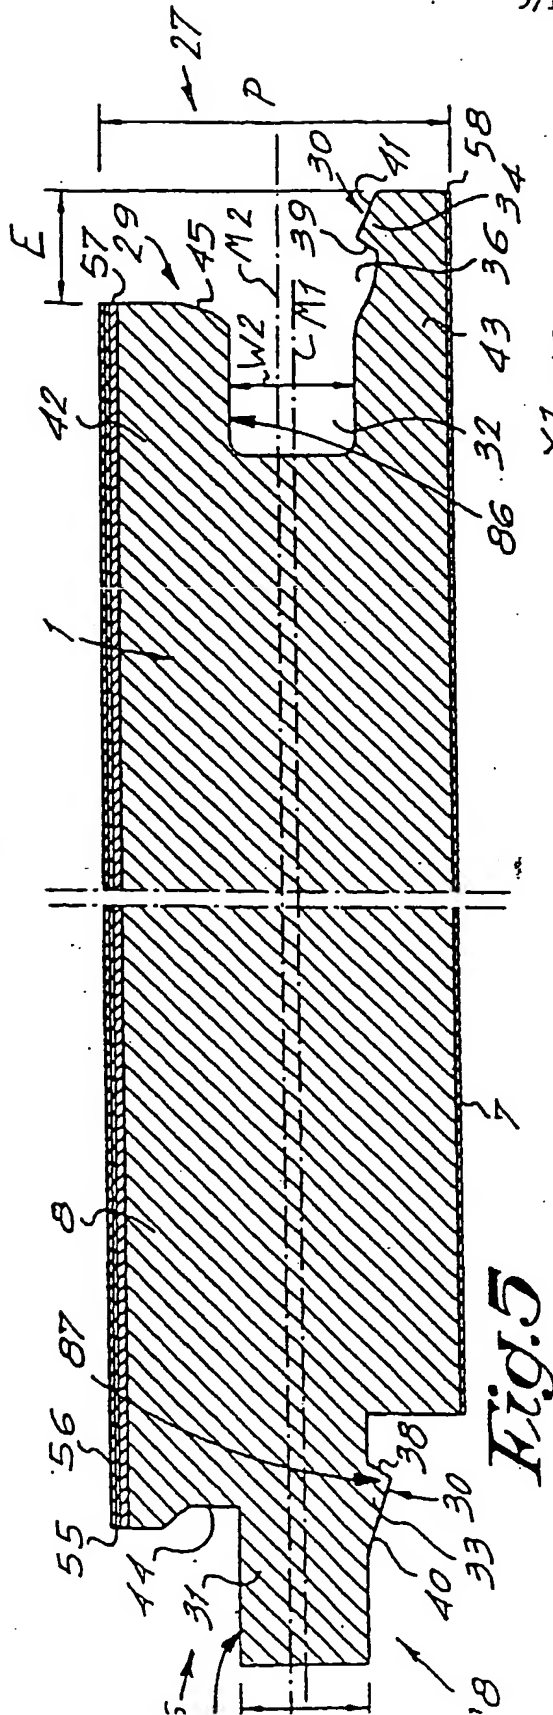
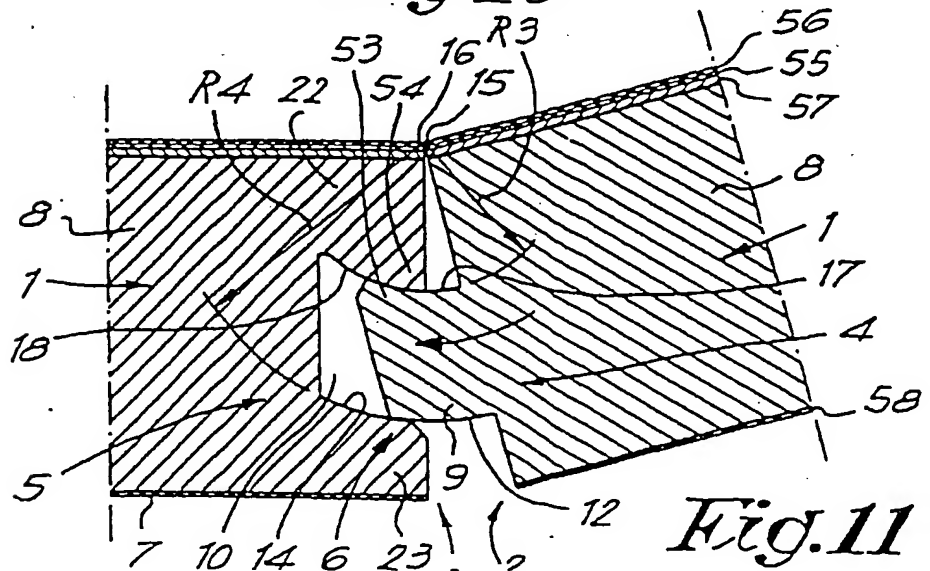
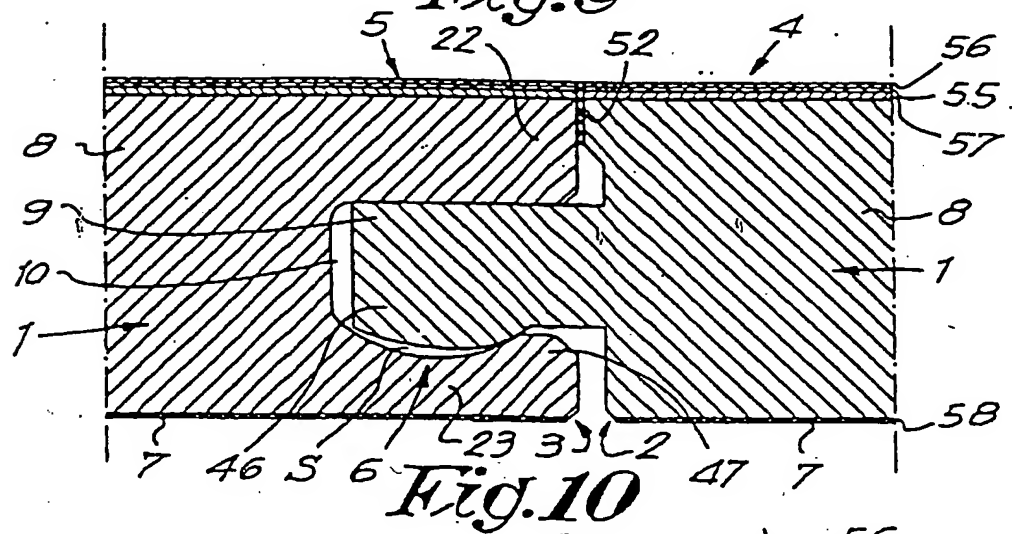
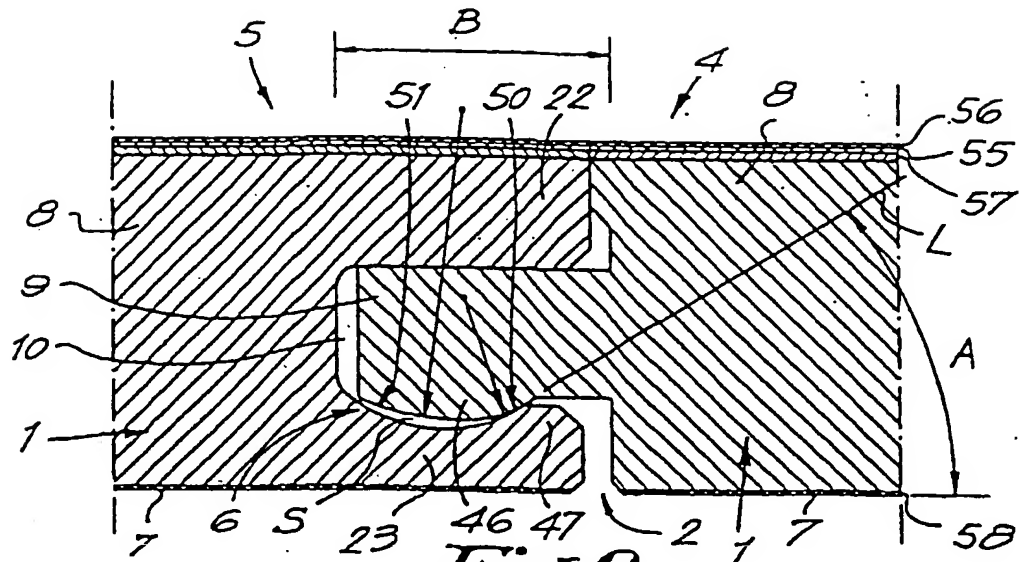


Fig. 4





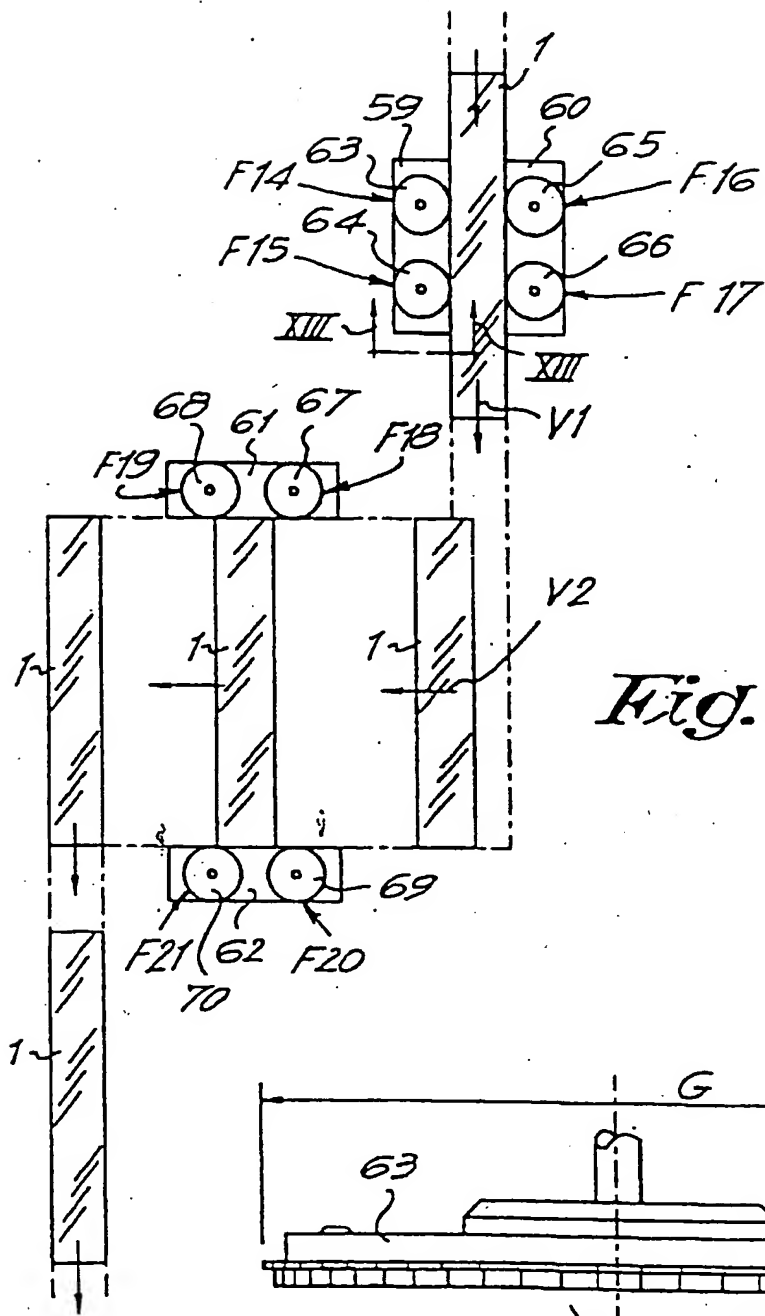


Fig. 12



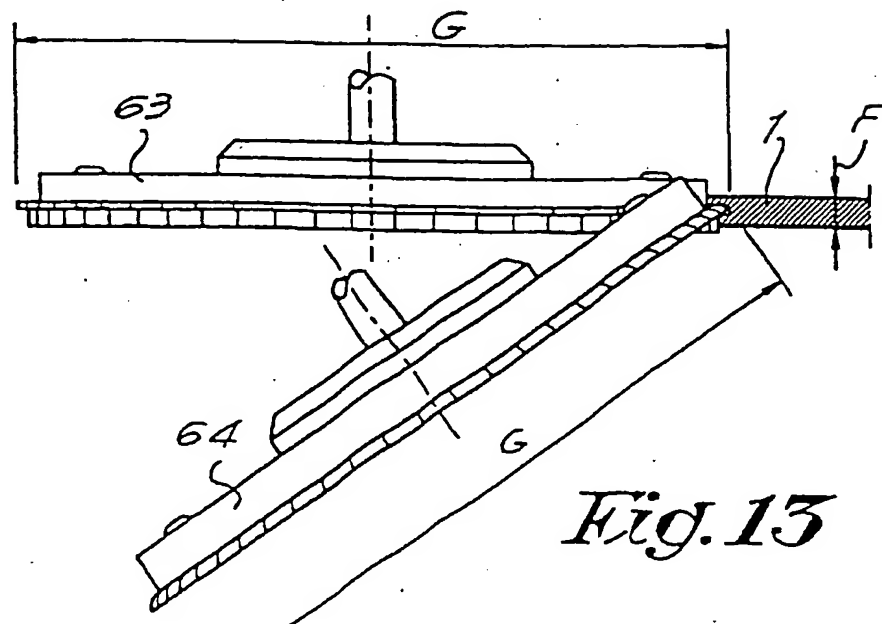



Fig. 13

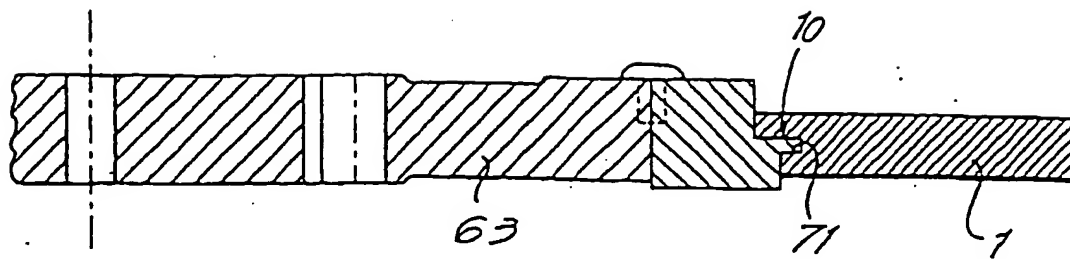

*Fig. 14*

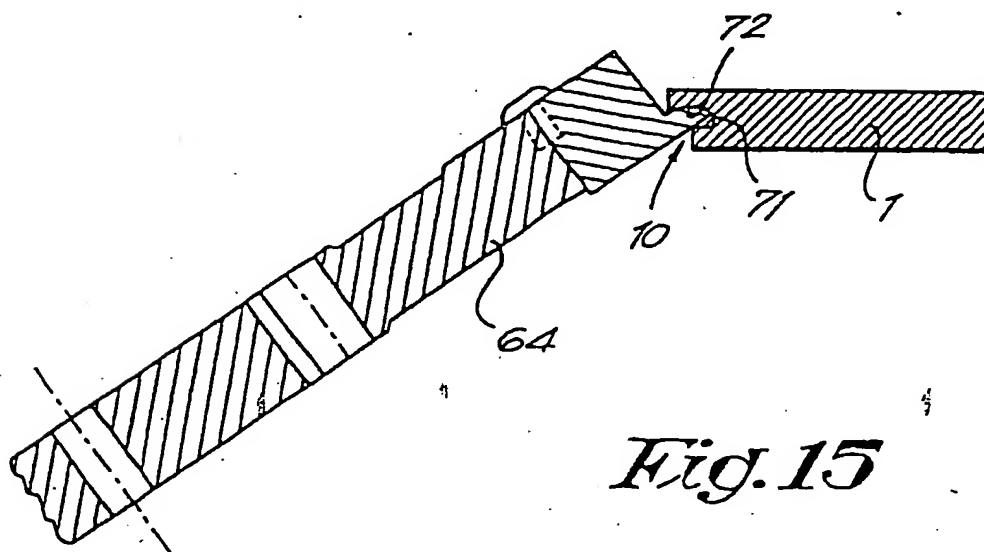



*Fig. 15*

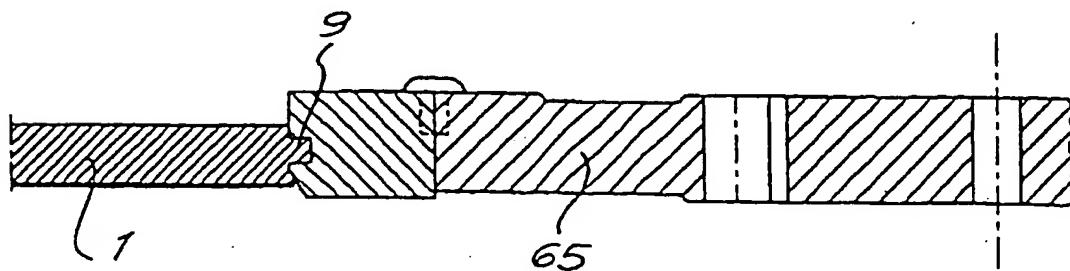


*Fig. 16*




*Fig. 17*

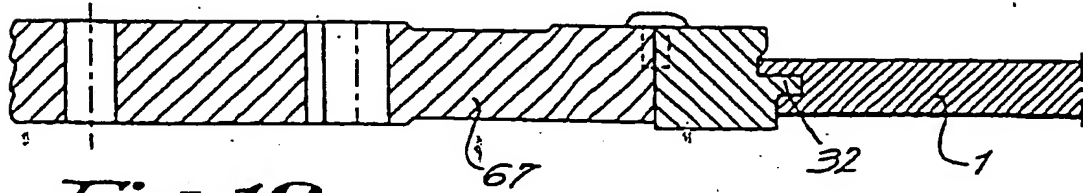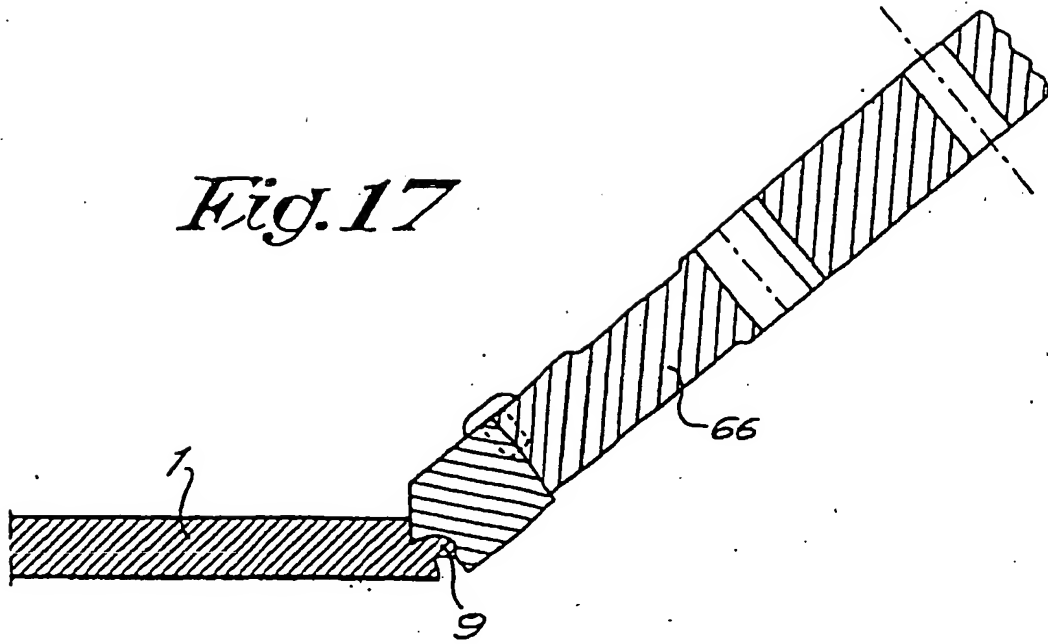


*Fig. 18*

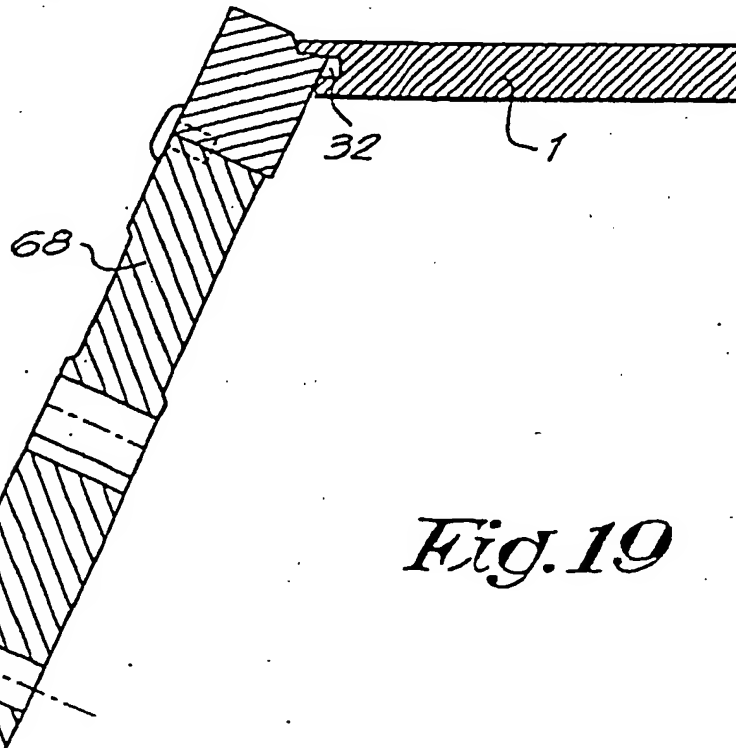



*Fig. 19*


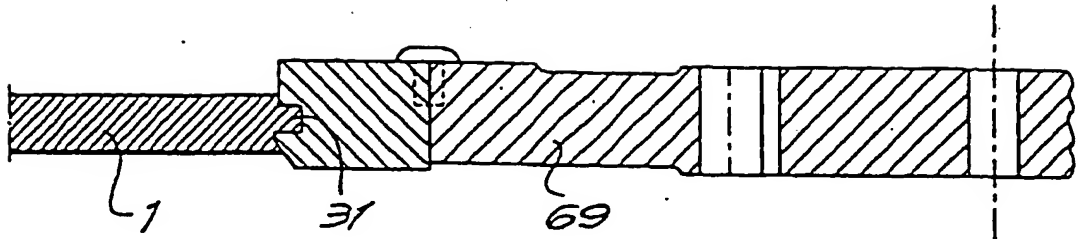


*Fig. 20*

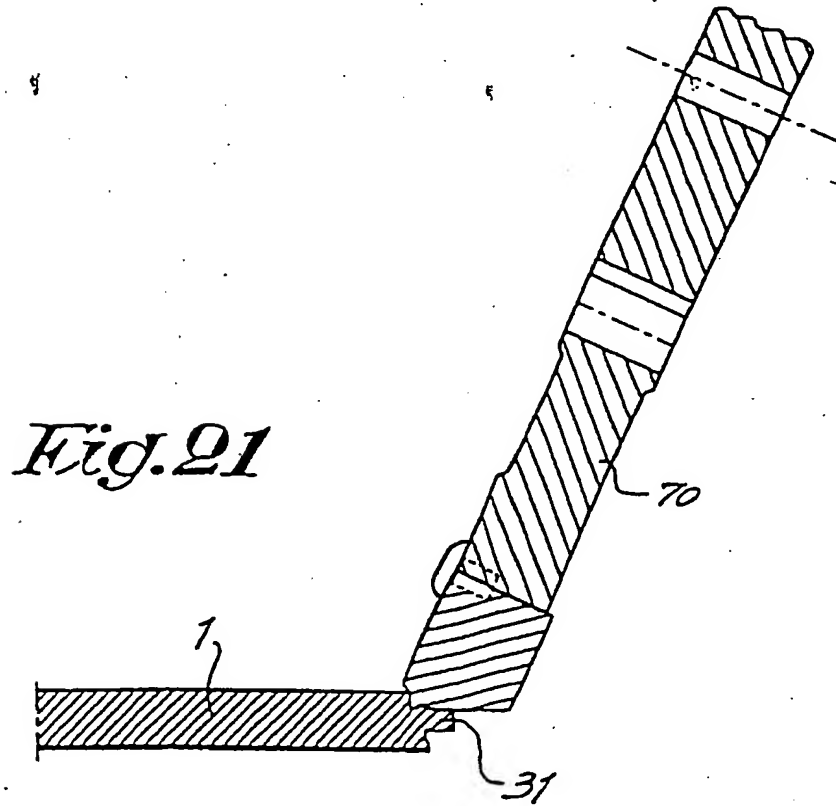

*Fig. 21*

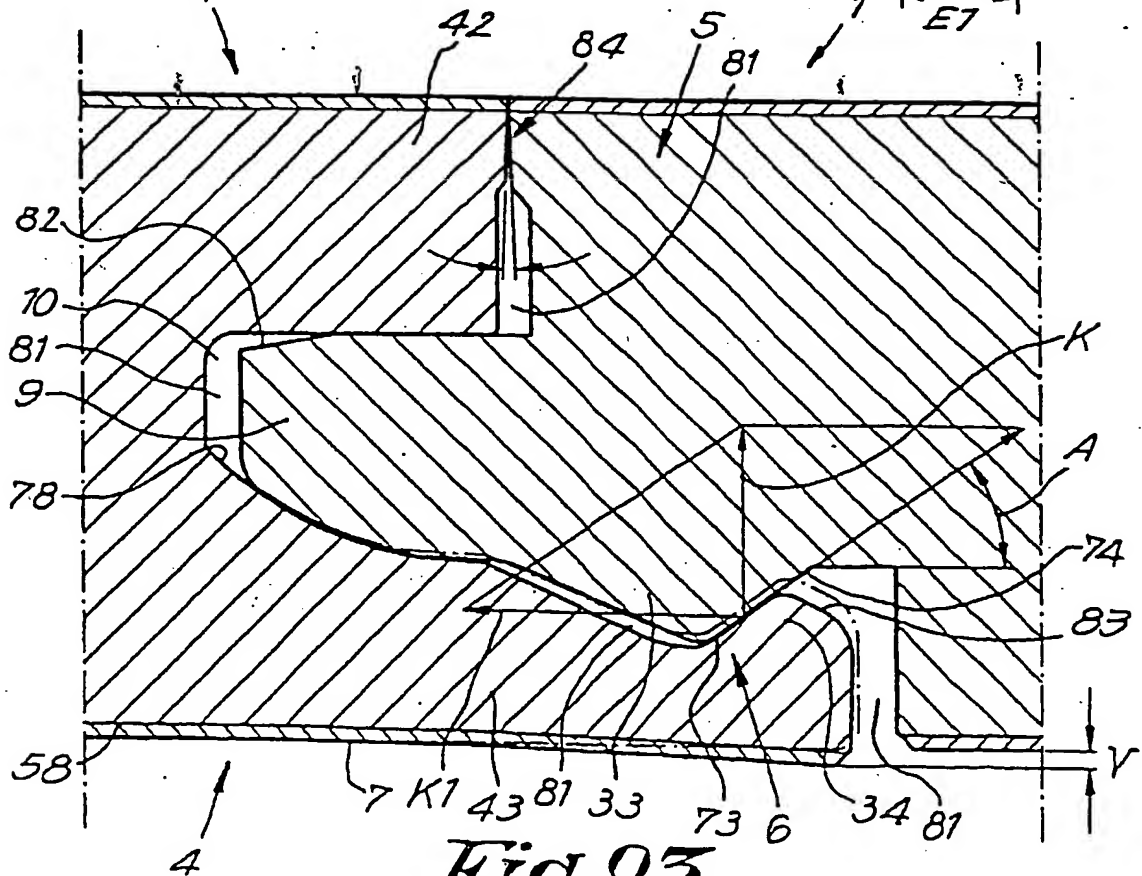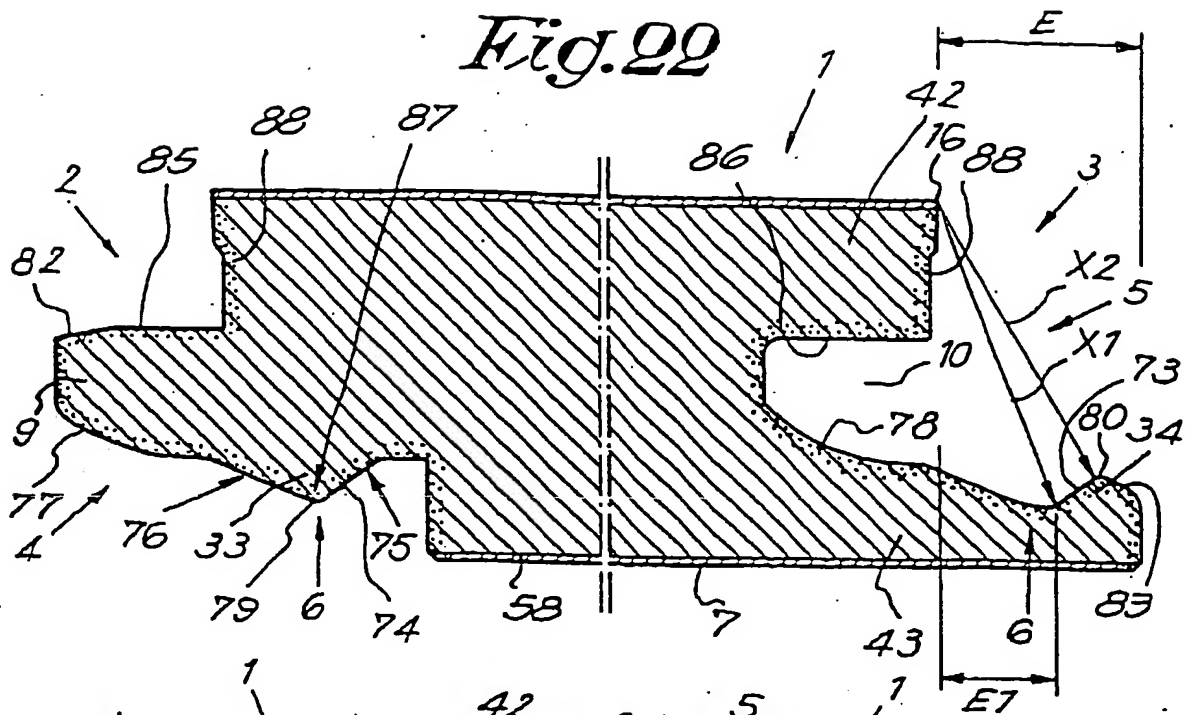*Fig. 22**Fig. 23*

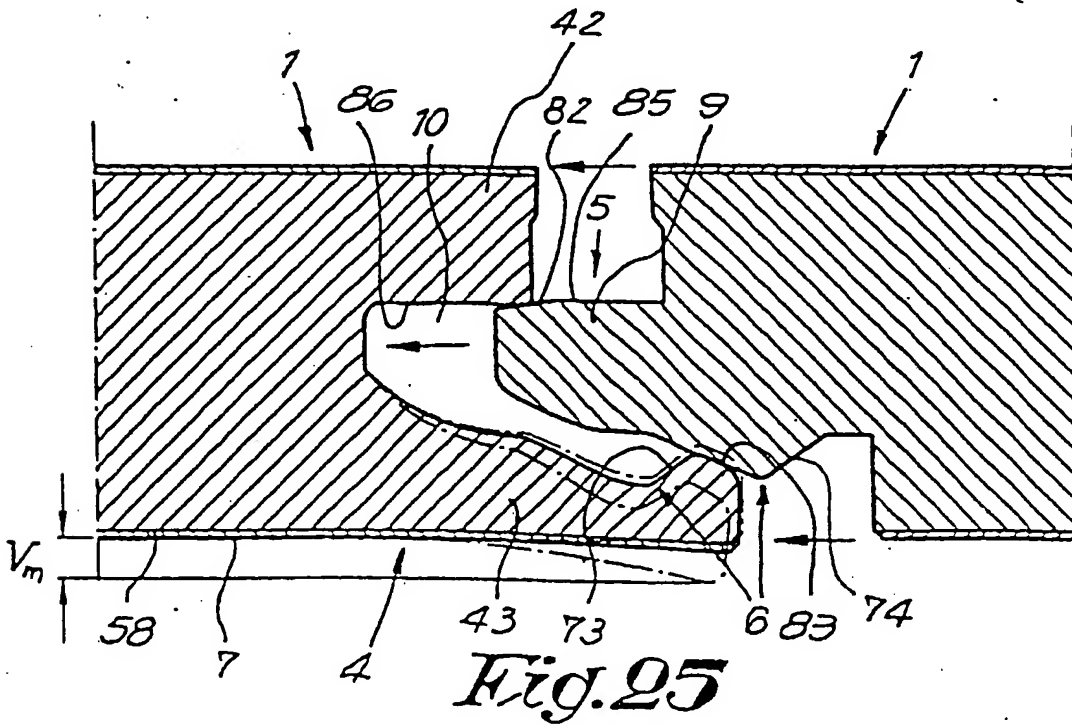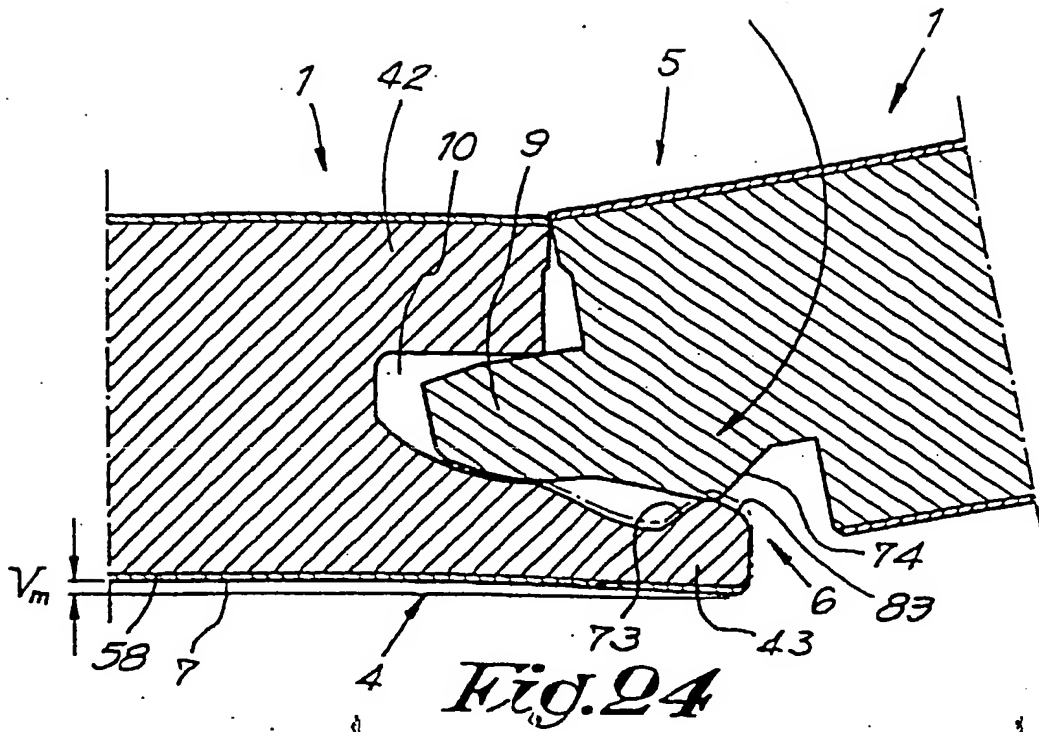

**This Page is Inserted by IFW Indexing and Scanning  
Operations and is not part of the Official Record**

**BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ BLACK BORDERS
- ☐ IMAGE CUT OFF AT TOP, BOTTOM OR SIDES
- ☐ FADED TEXT OR DRAWING
- ☒ BLURRED OR ILLEGIBLE TEXT OR DRAWING
- ☐ SKEWED/SLANTED IMAGES
- ☐ COLOR OR BLACK AND WHITE PHOTOGRAPHS
- ☐ GRAY SCALE DOCUMENTS
- ☒ LINES OR MARKS ON ORIGINAL DOCUMENT
- ☐ REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY
- ☐ OTHER: \_\_\_\_\_

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.**